

31058 U.S. PTO
03/28/01

3-29-

09/806619

JC13 Rec'd PCT/PTO 2 8 MAR 2001

PTO/SB/05 (03-01)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	870-003-133
First Inventor	Thomas DUFNER
Title	Electronically commutated motor
Express Mail Label No.	EL 762607687 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
- ☐ Applicant claims small entity status.
See 37 CFR 1.27.
- ☒ Specification [Total Pages 40]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 24]
- Oath or Declaration [Total Pages 3]
 - ☒ Newly executed (original or copy)
 - ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 18 completed)
 - ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
- ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

- ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - ☐ Computer Readable Form (CRF)
 - Specification Sequence Listing on:
 - ☐ CD-ROM or CD-R (2 copies); or
 - ☐ paper
 - ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- ☒ Assignment Papers (cover sheet & document(s))
- ☐ 37 CFR 3.73(b) Statement [Power of Attorney]
(when there is an assignee)
- ☒ English Translation Document (if applicable)
- ☒ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
- ☒ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
- ☐ Nonpublication Request under 35 U.S.C. 122
(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent.
- ☒ Other: PCT/EP 99/05282 SR.RPT.

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____
Prior application information. Examiner _____ Group Art Unit. _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

19. CORRESPONDENCE ADDRESS

☒ 4955 Customer Number or Bar Code Label [Insert Customer No. or Attach Bar code label here] or ☐ Correspondence address below

Name	Milton Oliver				
Address	755 Main Street, P O Box 224				
City	Monroe	State	CT	Zip Code	06468
Country		Telephone	203-261-1234	Fax	261-5676

Name (Print/Type)	Milton Oliver	Registration No. (Attorney/Agent)	28,333
Signature	Milton Oliver	Date	28 MAR 2001

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

09/806619

JC02 Rec'd PCT/PTO 28 MAR 2001

PTO/SB/17 (11-00)

Approved for use through 10/31/2002 OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL
for FY 2001**

Patent fees are subject to annual revision.

Complete if Known

Application Number	
Filing Date	Herewith
First Named Inventor	Thomas DUFNER
Examiner Name	
Group Art Unit	2800
Attorney Docket No.	870-003-133

TOTAL AMOUNT OF PAYMENT

(\$)**1258.00****METHOD OF PAYMENT**

- 1.
- ☒
- The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number
23-0442Deposit Account Name
WARE, FRESSOLA☒ Charge Any Additional Fee Required
Under 37 CFR 1.16 and 1.17☐ Applicant claims small entity status.
See 37 CFR 1.27

- 2.
- ☐
- Payment Enclosed:

☒ Check ☐ Credit card ☐ Money Order ☐ Other**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity Small Entity

Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Description	Fee Paid	
970	101	710	201	355	Utility filing fee	860
	106	320	206	160	Design filing fee	
	107	490	207	245	Plant filing fee	
	108	710	208	355	Reissue filing fee	
	114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$)**860.00****2. EXTRA CLAIM FEES**

Total Claims	Extra Claims	Fee from below	Fee Paid
31	-20** = 11	18	198
5	-3** = 2	80	160
Multiple Dependent			

Large Entity Small Entity

Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Description	Fee Paid
103	18	203	9	Claims in excess of 20	
102	80	202	40	Independent claims in excess of 3	
104	270	204	135	Multiple dependent claim, if not paid	
109	80	209	40	** Reissue independent claims over original patent	
110	18	210	9	** Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2) (\$)**358.00**

**or number previously paid, if greater, For Reissues, see above

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for <i>ex parte</i> reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Processing fee under 37 CFR 1.17(q)	
126	180	126	180	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify) _____

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)**40.00****SUBMITTED BY**

Name (Print/Type) Milton Oliver

Registration No.
(Attorney/Agent)

28,333

Complete (if applicable)

Telephone 203-261-1234

Signature

Milton Oliver

Date

MAR. 28, 2001

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

IN THE U.S. PATENT & TRADEMARK OFFICE

APPLICANTS: DUFNER et al. ATTORNEY DOCKET: 870-003-133

FILED: Herewith as §371 of PCT/EP99/05282

FOR: ELECTRONICALLY COMMUTATED MOTOR

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Please amend the above-identified application as follows:

IN THE SPECIFICATION:

Page 1, before line 1,

insert the heading --FIELD OF THE INVENTION--.

Page 1, line 11, after "DE-A 197 00 479.2" cancel "(internal: D201i)" and
insert --and corresponding U.S. Patent 6,078,152--.

Page 1, between lines 16 & 17,

insert heading --SUMMARY OF THE INVENTION--.

Page 1, line 20, cancel "according to claim 1".


Page 1, line 28, cancel "in accordance with claim 11".

Page 2, line 1, cancel "claim 17" and replace by
--a further refinement of the invention--.

"Express Mail" Mailing Label No. **EL 762607687 US**

Date of Deposit: **March 28, 2001**

I hereby certify that this document is being deposited with
the United States Postal Service "Express Mail Post Office to Addressee"
service under 37 C.F.R. 1.10 on the date indicated above and is addressed
to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.


Judith Schick

09/806619

IN THE CLAIMS:

1. (Amended) An electronically commutated motor comprising
a stator, a rotor (39), and a program-controlled
[microprocessor or microcontroller (11), hereinafter called a]
microprocessor, serving to control commutation of the motor;
an apparatus for sensing a time variable (t_H) that is substantially
inversely proportional to the rotation speed of the rotor (39);
an apparatus for calculating a time interval (t_{TI}) dependent on that
time variable (t_H);
an apparatus for triggering a motor control interrupt routine [(FIG.
10)] at [a time] an instant offset (t_{TI}) from a predefined rotor position,
that offset corresponding to the time interval (t_{TI}) dependent on the
sensed time variable (t_H);
wherein the motor control interrupt routine contains program steps
(S310, S318, S320, S322) for effecting a commutation of the motor.
2. (Amended) The motor according to claim 1, wherein
the motor control interrupt routine [(FIG. 10)] comprises program
steps (S304, S306) which prevent a commutation from being effected if the
time interval (t_{TI}) dependent on the sensed time variable is greater than
a time span (t_H) presently required by the rotor (39) to travel through a
predefined angular distance.
3. (Amended) The motor according to claim 2, [having] further comprising
an apparatus which triggers a rotor position-dependent interrupt
routine [(FIG. 8)] at predefined rotor positions.
4. (Amended) The motor according to claim 3, wherein
a timer (CNT_HL), controllable by the rotor position-dependent
interrupt routines [(FIG. 8)], is provided, in order to sense the time
variable that is substantially inversely proportional to the rotation speed
of the rotor.

5. (Amended) The motor according to claim 4, wherein
the timer (CNT_HL) is also configured to trigger a motor control
interrupt routine [(FIG. 10)].

6. (Amended) The motor according to claim 5, wherein
the timer (CNT_HL) is loadable, during a rotor position-dependent
interrupt [(FIG. 8)], with a first predefined count value (t_B) which
corresponds to the time offset (t_TI) dependent on the sensed time variable
(t_H);
and which brings about a motor control interrupt [(FIG. 10)]
after counting that first predefined count value.

7. (Amended) The motor according to claim 3, [any of the foregoing
claims,] wherein
a rotor-position-dependent interrupt [(FIG. 8)]
has a higher priority than a motor control interrupt [(FIG. 10)].

8. (Amended) The motor according to claim 4, [any of claims 4 through
7,] wherein
the timer (CNT_HL) is loadable, during a motor control interrupt
(FIG. 10: S302), with a predefined count value (t_AR);
and, subsequent to that loading operation, a count is performed until
the next rotor position-dependent interrupt [(FIG. 8)], so as to ascertain,
by taking the difference between the predefined count value (t_AR) and the
counter status (t_E) upon reaching the next rotor position-dependent
interrupt [(FIG. 8)], a time offset [(FIG. 7A: t_1)] between these
interrupt operations.

9. (Amended) The motor according to claim 8, [wherein] further
comprising
an autoreload register (AR) for loading the predefined count value (t_AR),
which register stores the first predefined count value (t_TI) and feeds it
to the timer (CNT_HL) during the motor control interrupt (FIG. 10) as the
predefined count value. [, is provided for loading the predefined count
value (t_AR).]

Cancel claims 10-29 and replace by the following new claims 30-51:

30. A method of rotation-speed-dependent commutation of an electronically commutated motor comprising a stator, a rotor and a program-controlled microprocessor serving to control commutation of said motor, comprising the steps of:

- a) ascertaining a time variable (t_H) that is substantially inversely proportional to the rotation speed of the rotor;
- b) from that time variable (t_H), calculating a numerical value (t_{TI}) according to a predefined calculation rule;
- c) measuring, beginning at a predefined first rotor position, a first time interval corresponding to that calculated numerical value;
- d) determining when said first time interval has elapsed, and thereafter triggering a commutation (TN);
- e) subsequent to the end of said first time interval, measuring a second time interval (t_1) until said rotor reaches a predefined second rotor position;
- f) adding the first and second time intervals, and designating their sum as a time variable (t_H) that is substantially inversely proportional to the rotation speed of the motor.

31. The method of claim 30, further comprising the step of correcting said sum by at least one correction factor.

32. The method according to claim 30, wherein said predefined calculation rule comprises subtracting a predefined time (t_{ZW}) from said time variable (t_H) that is substantially inversely proportional to the rotation speed of the rotor.

33. The method according to claim 30, further comprising determining whether the first time interval corresponding to the calculated numerical value (t_{TI}) is greater than a time offset between the predefined first rotor position and the predefined second rotor position, and, if so, directly sensing the time offset between those two rotor positions and using the time offset as said time variable (t_H) that is substantially inversely proportional to the rotation speed of the motor.

34. The method according to claim 30, further comprising comparing said time variable (t_H) that is substantially inversely

proportional to the rotation speed of the motor to a predefined value (t_SZW) corresponding to a minimum rotation speed (S264);
storing a logical value (SZW), corresponding to a result of said comparison result; and
if that logical value (SZW) has a predefined value, suppressing (S304, S306) the triggering of a commutation that would otherwise be accomplished after the first time (t_TI) has elapsed.

35. The method according to claim 30, further comprising
detecting when a predefined rotor position is reached, and
executing a rotor position-dependent interrupt with an interrupt routine at the beginning of which a timer (CNT_HL), providing time measurement,
is stopped (S202), and its instantaneous value is stored in a variable (t_E).

36. The method according to claim 35, further comprising
in the rotor-position-dependent interrupt routine, stopping (S202) the timer (CNT_HL) providing time measurement, then loading the timer with a numerical value (t_TI) previously calculated in accordance with the predefined calculation rule, and thereafter restarting the timer (S238).

37. The method according to claim 36, further comprising
using the time span, between the stopping of the timer (CNT_HL) providing time measurement and the restarting thereof, as a correction factor (t_CORR) during said step of ascertaining the time variable (t_H) that is
substantially inversely proportional to the rotation speed of the motor.

38. The method according to claim 30,
further comprising the steps of
ascertaining said time variable that is substantially inversely proportional to the rotation speed of the rotor;
using said ascertained time variable in calculating (542, 544, 546) said first time interval corresponding to the calculated numerical value (t_TI), which is measured from a predefined first rotor position; and
measuring said first time interval, corresponding to said calculated numerical value, beginning at a predetermined rotor position that is reached about one rotor revolution after that ascertaining step.

39. The method according to claim 30, further comprising
determining whether sufficient processor time is available for executing a predetermined non-time critical process step and, if so,

43. An electronically commutated motor comprising
a stator,
a rotor (39),
a microprocessor which executes a program which controls commutation
of the motor (M),
means for starting a timer (CNT_HL) with a predefined start value
(t_TI) at at least one predefined rotational position of said rotor (39);
means, responsive to said timer (CNT_HL), for triggering an interrupt
in said program of said microprocessor after elapse of a time interval
having a duration dependent on the start value (t_TI); and
means for commutating (S318, S320, S322) said motor during said
interrupt.

44. The motor according to claim 43, further comprising
means for deriving the start value (t_TI) of the timer (CNT_HL) as a
function of a rotation-speed-dependent time interval (t_H) which the rotor
(39) has required, in a time period preceding that commutation,
to rotate through a predefined rotation angle.

45. The motor according to claim 44, wherein said means for deriving
further comprises
means for subtracting a predefined time (t_ZW)
from the rotation-speed-dependent time interval (t_H)
as part of a calculation of the start value (t_TI).

46. A method of determining a rotation speed-dependent variable in an electronically commutated motor (M) which includes
- a stator,
 - a permanent-magnet rotor (39),
 - a galvanomagnetic sensor (40) controlled by that rotor,
- a microprocessor (11), a control program associated with that microprocessor, and a timer (CNT_HL), comprising the steps of:
- a) converting an output signal of the galvanomagnetic sensor (40) into a substantially square-wave signal (HALL);
 - b) sensing, in the microprocessor, predefined signal changes of the square-wave signal (HALL) and converting each signal change into a respective rotor-position-dependent interrupt (FIG. 4: Y);
 - c) at a rotor-position-dependent interrupt (Y), recording a first counter status (t_0) of the timer;
 - d) at a rotor position-dependent interrupt (Y) subsequent thereto, recording a second counter status (t_E) of the timer;
 - e) calculating a difference between the two counter statuses (t_0, t_E) and deriving, from said difference, a value (HL) which corresponds to time required by the rotor (39) to travel through a predefined rotation angle; and using said value (HL) as the rotation-speed-dependent variable.
47. An electronically commutated motor (M) comprising
- a stator (38) and a rotor (39),
 - a program-controlled microprocessor(11), adapted for controlling the commutation of the motor (M); and
 - a rotor position sensor (40, 41) whose output signal is applied, for purposes of analysis by the microprocessor (11), to an interrupt-capable input of that microprocessor, for processing therein;
- said microprocessor furnishing, at at least one output of the microprocessor, a control signal (OUT1, OUT2), for commutation of the motor, that is shifted, with respect to the signal of the rotor position sensor (40, 41), by a shift time, the duration of the shift time being a function of the rotation speed of said motor.

48. The electronically commutated motor (M) according to claim 47, wherein the microcontroller (11) comprises at least one interrupt-capable timer (CNT_HL) with which the at least one output of the microprocessor, serving to deliver the control signal, is influenced.

49. The electronically commutated motor (M) according to claim 48, wherein the timer (CNT_HL) is, in a specific state, automatically reloaded with a value (t_AR) and restarted.

50. The electronically commutated motor (M) according to claim 48, wherein the microprocessor triggers an interrupt at each change in the signal (HALL) of the rotor position sensor (40, 41); and wherein the timer (CNT_HL) and the interrupts are used to measure a value dependent on rotor speed.

51. The electronically commutated motor (M) according to claim 49, wherein the microprocessor triggers an interrupt at each change in the signal (HALL) of the rotor position sensor (40, 41); and wherein the timer (CNT_HL) and the interrupts are used to measure a value dependent on rotor speed.

REMARKS

For the convenience of the U.S. reader, English texts, corresponding to various cited German patent documents, have been identified. See also the IDS.

In order to improve readability, some of the translated German claims have been cancelled, and claims in customary US format have replaced them. For example, claim 30 replaces original claim 10, which recited the steps using past tense verbs. Claim 30 is directed to the subject-matters of FIGS. 7A/7B and 10. As shown at left in FIG. 7B, the counter is started with a value, e.g. 9800 microseconds, as described at specification page 11, lines 5-18. When this counter has counted down to zero (at time $TN+1$), the interrupt routine shown in FIG. 10 is executed. Thus, in step S302, the value t_{AR} is loaded into counter CNT_HL and the counter is restarted. In order to avoid the need for two separate counters, the counter is first used to count down from value t_B , followed by the interrupt, then used to count down from value t_B' , as shown in FIG. 7B and described on page 11.

Apparatus claims 43-45 replace original apparatus claims 22-24.

Method claim 46 replaces original method claim 25.

Apparatus claims 47-51 replace original claims 26-29.

If the examiner notes any other informalities which would prevent examination on the merits, a call to the undersigned is invited.

Respectfully submitted,

Milton Oliver

Milton Oliver, Reg. No. 28,333
WARE, FRESSOLA, VAN DER SLUYS
& ADOLPHSON, LLP

PO BOX 224
MONROE CT 06468-0224
Tel: (203) 261-1234
Fax: (203) 261-5676
EMAIL: milton_oliver@post.harvard.edu

Attorney Docket # 870-003-133

March 6, 2001 *As Smith*

March 6, 2001 *Thomas Dufour*

11

March 6, 2001 *Jörg Kammerling*

March 6, 2001 *Rappened, Brumann*

March 6, 2001 *Frank J. J. J.*

09606619 "03301
T03301" 67990360

CLEAN COPY OF CLAIMS

IN THE CLAIMS:

1. (Amended) An electronically commutated motor comprising
a stator, a rotor (39), and a program-controlled
microprocessor, serving to control commutation of the motor;
an apparatus for sensing a time variable (t_H) that is substantially
inversely proportional to the rotation speed of the rotor (39);
an apparatus for calculating a time interval (t_{TI}) dependent on that
time variable (t_H);
an apparatus for triggering a motor control interrupt routine at an
instant offset (t_{TI}) from a predefined rotor position, that offset
corresponding to the time interval (t_{TI}) dependent on the sensed time
variable (t_H);
wherein the motor control interrupt routine contains program steps
(S310, S318, S320, S322) for effecting a commutation of the motor.
2. (Amended) The motor according to claim 1, wherein
the motor control interrupt routine comprises program steps (S304,
S306) which prevent a commutation from being effected if the time interval
(t_{TI}) dependent on the sensed time variable is greater than a time span
(t_H) presently required by the rotor (39) to travel through a predefined
angular distance.
3. (Amended) The motor according to claim 2, further comprising
an apparatus which triggers a rotor position-dependent interrupt
routine at predefined rotor positions.
4. (Amended) The motor according to claim 3, wherein
a timer (CNT_HL), controllable by the rotor position-dependent
interrupt routines, is provided, in order to sense the time variable that
is substantially inversely proportional to the rotation speed of the rotor.

09606619-036001

5. (Amended) The motor according to claim 4, wherein
the timer (CNT_HL) is also configured to trigger a motor control
interrupt routine.

6. (Amended) The motor according to claim 5, wherein
the timer (CNT_HL) is loadable, during a rotor position-dependent
interrupt, with a first predefined count value (t_B) which corresponds to
the time offset (t_TI) dependent on the sensed time variable (t_H);
and which brings about a motor control interrupt
after counting that first predefined count value.

7. (Amended) The motor according to claim 3, wherein
a rotor-position-dependent interrupt
has a higher priority than a motor control interrupt.

8. (Amended) The motor according to claim 4, wherein
the timer (CNT_HL) is loadable, during a motor control interrupt
(FIG. 10: S302), with a predefined count value (t_AR);
and, subsequent to that loading operation, a count is performed until
the next rotor position-dependent interrupt, so as to ascertain,
by taking the difference between the predefined count value (t_AR) and the
counter status (t_E) upon reaching the next rotor position-dependent
interrupt, a time offset between these interrupt operations.

9. (Amended) The motor according to claim 8, further comprising
an autoreload register (AR) for loading the predefined count value (t_AR),
which register stores the first predefined count value (t_TI) and feeds it
to the timer (CNT_HL) during the motor control interrupt (FIG. 10) as the
predefined count value.

0930549-03301

24/PRTS

ELECTRONICALLY COMMUTATED MOTOR

The invention concerns an electronically commutated motor, and in particular an electronically commutated motor with an "ignition advance angle." This is understood to mean that commutation is shifted to an earlier point in time, usually as a function of rotation speed. Of course nothing is "ignited" in an electric motor, but this term (borrowed from automotive engineering) is often used for its descriptive value, as is the phrase "ignition angle shifting." This term will therefore be used hereinafter even though it is scientifically not entirely correct.

BACKGROUND:

Electronically commutated motors with an ignition advance angle are known, for example, from DE-A 197 00 479.2 [(internal: D201i)]. Here the commutation accuracy is insufficient for many situations, and the program must execute in accordance with a fixed time pattern; this is complex, and in many cases does not sufficiently utilize the computing performance of a processor. The commutation operations can also fluctuate somewhat in time, which increases the noise of such a motor.

It is therefore an object of the invention to make available a new electronically commutated motor and a method for operating such a motor.

According to a first aspect of the invention, this object is achieved by an electronically commutated motor according to claim 1 wherein the time at which a motor control interrupt routine is triggered varies as a function of current rotation speed of the motor. A motor of this kind operates with better efficiency, especially at higher rotation speeds, because commutation can be advanced more and more as the rotation speed increases. The use of an interrupt routine results in precisely timed control of the commutation operation, and thus in a quiet-running motor.

The stated object is achieved in another way by a method according to the present invention in accordance with claim 11 wherein a second time interval is subtracted, during the calculation, from a time variable which is substantially inversely proportional to the rotation speed of the motor. By also measuring a second time after the first time has elapsed, it is very easy to obtain, by addition of these two times and optionally of a correction factor, a time variable which is substantially inversely proportional to the rotation speed of the motor and which can serve, in a subsequent commutation operation, as an updated time variable for calculating a new numerical value for the first time.

According to claim 17, this time variable, inversely proportional to rotation speed, is preferably used for a commutation operation that is located one rotor revolution later than the measurement of the first and second times, because a particularly quiet-running motor is then obtained. If the time variable is measured, for example, in the rotation angle region from 0° to 180° (elec.), one revolution later it can be the basis for controlling a commutation that takes place there approximately in the same angular region from 0° to 180° (elec.).

Also, in particularly preferred fashion, at least one non-time-critical process step is configured as a subroutine which is invoked in the program sequence if processor time is available for it. In contrast to a program with a fixed time pattern, this makes possible optimal use of a processor's resources, since with this procedure the subroutine is executed if the processor has nothing else to do at the time.

Further details and advantageous developments of the invention are evident from the exemplary embodiments, which are described below and depicted in the drawings and are in no way to be understood as a limitation of the invention[, and from the other dependent claims]. In the drawings:

FIG. 1 shows, as an example, an overview of an embodiment of the invention;

FIG. 2 shows the pin assignment of the COP842CJ microcomputer;

FIG. 3 is a circuit diagram showing the components for processing the Hall signal;

FIG. 4 depicts the Hall signal and a commutation operation with no ignition angle shift;

FIG. 5 is a schematic depiction to explain the calculation of an (advanced) commutation instant T_N from values that are derived from a signal HALL;

FIGS. 6A and 6B depict calculation of the Hall length when a timer interrupt is not present;

FIGS. 7A and 7B depict calculation of the Hall length when a timer interrupt is present;

FIGS. 8A and 8B show a flow chart for a Hall interrupt routine with ignition angle shifting;

FIG. 9 is a flow chart of an ignition angle calculation routine;

FIG. 10 is a flow diagram of a timer interrupt routine with ignition angle calculation;

FIG. 11 depicts the Hall signal during acceleration of a motor;

FIGS. 12A and 12B depict the Hall signal and the associated variables of the drive function;

FIG. 13 is a circuit diagram with parts that are important for controlling and driving the electronically commutated motor;

FIG. 14 is a circuit diagram with parts that are important for activating an EEPROM and for data connection via a bus 30;

FIG. 15 depicts a preferred embodiment of a function manager;

FIG. 16 shows a function register used in the function manager;

FIG. 17 schematically depicts the permanent magnet of a four-pole external rotor;

FIGS. 18A and 18B are diagrams to explain the effect of errors in the magnetization of the external rotor of FIG. 17;

FIG. 19 is a flow chart for ignition angle calculation, similar to FIG. 9 but in a preferred modified form;

FIG. 20 is a flow chart of a Hall interrupt routine for a commutation operation as depicted in FIG. 4;

FIG. 21 schematically depicts the commutation sequence for the case in which the commutation instants are electronically advanced;

FIG. 22 shows the change over time in signal HALL and in current i_M in a motor winding when the commutation instant is not advanced; and

FIG. 23 shows the change over time in signal HALL and in current i_M in a motor winding when the commutation instant is advanced.

OVERVIEW OF THE ELECTRONICALLY COMMUTATED MOTOR (ECM)

FIG. 1 shows an overview of a preferred exemplary embodiment of an electronically commutated motor (ECM) according to the present invention. The latter is controlled by means of a microcontroller (μC) 11, or alternatively a microprocessor. The terminals of μC 11 used in the exemplary embodiment (COP842CJ) are depicted by way of example in FIG. 2.

The program executed in μC 11 is structured with the aid of a function manager that is described below with reference to FIGS. 15 and 16.

By way of the "CTL EEPROM" function 24, μC 11 has access to a nonvolatile memory (here an EEPROM 26) from which it can load operating parameters into a RAM 25. It can also store operating parameters in RAM 25 and in EEPROM 26. μC 11 can receive and send data by means of a communication function COMM 28 and a bus interface 30. It can use the received data to control the motor, or can store them in RAM 25 or EEPROM 26. EEPROM 26 and bus interface 30 are described with reference to FIG. 14.

An electronically commutated motor M with a single phase 38 is shown in FIG. 1 as a simple example. A motor of this kind is disclosed, for example, in DE 23 46 380 C.

This phase 38 is energized by a transistor output stage 36. Outputs OUT1 and OUT2 of μ C 11 control npn transistors 141, 142, 143, and 144 which are connected as H-bridge 37. The current through stator winding 38 flows in one direction or the other depending on whether OUT1 is set to HIGH and OUT2 to LOW, or vice versa. The invention is of course similarly suitable for any kind of electronically commutated motor, e.g. for three-phase motors and others. This is therefore only an exemplary embodiment.

Commutation is accomplished electronically. For this purpose, the position of permanent-magnet rotor 39 is sensed via a Hall sensor 40 and an electronic Hall circuit 41 which is shown in more detail in FIG. 3, processed into a signal HALL, and forwarded to a drive function AF 42 which has a Hall interrupt routine HIR (FIG. 8), a timer interrupt routine TIR (FIG. 10), an ignition angle calculation routine ZWR (FIG. 9), and a timer CNT_HL. In the exemplary embodiment, timer CNT_HL is a component of the microcontroller 11 that is used, but it could also be a separate component. Its purpose is to measure times with high precision, and it is controllable via commands of μ C 11.

Drive function 42 provides correct commutation of transistor output stage 36 and safe operation, for example, in the event of an overload of transistor output stage 36. Commutation without ignition angle shifting is explained in FIG. 4. Commutation with ignition angle shifting is explained in FIGS. 6 through 12B, and is depicted in FIG. 21.

In the exemplary embodiment, rotation speed controller RGL 43 controls the motor rotation speed. (Motor M can of course also be operated without rotation speed controller 43.) Rotation speed control can be performed, for example, by means of a pulse width modulation (PWM) generator 34, or via a block control system that is schematically indicated at 60 with dashed lines. Regarding the block control system, reference is made, for example, to DE 44 41 372.6 (internal: D183i), which discloses an example of a block control system of this kind.

PWM generator 34 has a sawtooth generator 35, a control voltage generator 45, and a comparator 120, and is explained in more detail with reference to FIG. 13. The invention can, of course, also be used in an ECM without rotation speed control.

5 An " $I < I_{max}$ " current limiter 44 reduces the energization of output stage 36 if the current in the single phase 38 becomes too high, for example as the motor is started. Current limiter 44 is described in more detail with reference to FIG. 13.

10 Preferred values for the electronic components used in the individual Figures of the exemplary embodiment are listed at the end of the specification, and the reader is referred thereto.

15 FIG. 2 shows the pin assignment of microcontroller (μC) 11 (model COP842CJ of National Semiconductor) used in the exemplary embodiment. The labeling inside μC 11 corresponds to the manufacturer's labeling; the external labeling of the respective lines shows the designations used principally in the application. A black quarter-circle is drawn at the top left for position identification, and appears also in the subsequent figures.

20 FIG. 3 shows a detailed circuit diagram of the components for Hall circuit 41 which processes the signal of Hall sensor 40, the wiring of clock inputs CK0 and CK1, and the wiring of reset input RES. The other components are not shown in FIG. 3.

25 An oscillator crystal 97, which is connected to terminals CK0 and CK1 (cf. FIG. 3) of μC 11, defines the latter's clock frequency, e.g. 10 MHz. Reset input Res (FIG. 3) is connected via a capacitor 99 to ground 100 and via a resistor 101 to +Vcc. These two components generate a reset upon power-up in the usual way.

30 Hall generator 40 is powered by being connected to ground 100 and, via a resistor 106, to +Vcc. Its output signal u_H is conveyed to the two inputs of a comparator 108 whose input Vcc has a filter capacitor 110 associated with it. The output of comparator 108 is connected via a feedback resistor 112 to the

positive input of comparator 108, and via a so-called pull-up resistor 114 to +Vcc. The output of comparator 108 is also connected directly to port Hall (FIG. 3) of μ C 11 so that a rectangular signal HALL, controlled by rotor magnet 39 (FIG. 2), is obtained there.

5 THE SIGNAL OF HALL SENSOR 40, AND COMMUTATION

FIG. 4 shows a diagram with signal HALL (FIG. 3) and the associated commutation that occurs in the case in which "ignition angle shifting" is not used, i.e. commutation is controlled directly by signal HALL.

10 In its idealized form, signal HALL has a value $HALL = 0$ during one rotor rotation of 180° (elec.) and a value $HALL = 1$ during the subsequent rotation of 180° (elec.). Each change from $HALL = 1$ to $HALL = 0$ or vice versa brings about an interrupt operation in μ C 11, indicated in FIG. 4 by a Y in the row labeled "HALL INT."

15 The time between two Hall changes, e.g. between instants t_0 and t_E , is hereinafter called the Hall length HL or Hall time t_H , and is plotted in FIG. 4 as the true Hall length HL. The Hall length is an indication of the rotation speed of the motor. The shorter it is, the greater the rotation speed of rotor 39 (FIG. 1). (A "true value" is the present value measured at the motor.)

20 In this example, energization of the stator windings is controlled by output signals OUT1 and OUT2 of μ C 11 (FIGS. 1 and 2), which are indicated in FIG. 4, for example, for operation at low rotation speeds, and are described in FIG. 21.

25 When OUT1 is at 1 (HIGH) and OUT2 at 0 (LOW), current then flows (FIG. 1) from positive voltage $U_{\#}$ through transistor 144, stator winding 38, transistor 141, and measurement resistor 140 to ground.

30 If OUT1 is at 0 and OUT2 at 1, on the other hand, current then flows (FIG. 1) from positive voltage $U_{\#}$ through transistor 142, through stator winding 38 in the opposite direction, through transistor 143 and measurement resistor 140 to ground. Stator winding 38 is then oppositely energized.

If no ignition angle shift is applied, the two values OUT1 and OUT2 are briefly (e.g. for 50 μ s) set to zero by μ C 11 at the points at which signal HALL changes (i.e. at Hall interrupts Y), so as briefly to inhibit all four transistors 141 through 144 and prevent a short circuit in bridge 37. This is depicted in FIG. 4.

A simple Hall interrupt routine for the commutation operation shown in FIG. 4 is described below with reference to FIG. 20.

RELATIONSHIP BETWEEN ROTATION SPEED AND HALL LENGTH

The Hall length HL is depicted in FIG. 4. Its relationship to the rotation speed n will be demonstrated below. This relationship is a function of the number of poles P of rotor 39.

If the Hall length HL' is measured in seconds, then:

$$HL' = T/P \quad (1)$$

where:

T = duration of one rotor revolution (in seconds) and

P = number of poles of rotor 39.

If the rotation speed n is measured in rpm, then:

$$HL' = 60/(n \times P) \quad (2)$$

where:

n = rotation speed (in rpm) and

P = number of poles of rotor 39.

Since the Hall length HL is denominated in μ s in the exemplary embodiment but HL' is denominated in seconds, HL' is renormalized to HL:

$$HL = 1,000,000 HL' \quad (3)$$

For P = 4, i.e. a four-pole rotor, then:

$$HL = 15,000,000/n \quad (4)$$

Conversely, for P = 4:

$$n = 15,000,000/HL \quad (5)$$

where:

n = rotation speed (in rpm) and

HL = Hall length (in μ s).

The rotation speed $n = 2870 \text{ min}^{-1}$ corresponds, for example in the case of a four-pole rotor, to a Hall length HL of:

$$HL = 15,000,000/2870 = 5226 \mu\text{s}.$$

The hexadecimal representation (used within the processor) for this is 0x146A. (Hexadecimal numbers are identified by a "0x" prefix.)

IGNITION ANGLE SHIFTING

In the motor shown in FIG. 1, rotor position sensor 40 is arranged in a pole gap of the stator, i.e. at 0° (elec.), and a change in signal HALL is thus generated at 0° (elec.), 180° (elec.), 360° (elec.), etc., as depicted by way of example in FIG. 4. Regarding such an arrangement the reader is referred, for example, to DE-A-197 00 479.2 (internal: D201i), Fig. 1, reference 25.

In fast-running motors, however, it is necessary, in order to optimize

performance and efficiency, to perform commutation of the current in stator winding 38 prior to the change in the Hall signal, i.e. at a time before t_0 in FIG. 4 and also before t_E . This can be referred to as "ignition advance." To achieve this, it would be possible to displace rotor position sensor 40 relative to the stator of motor 39. But since the motor usually needs to run in both direction, and the advance angle needs to increase with increasing rotation speed in both directions, this is not practical.

The ignition angle shift is therefore controlled electronically. The 16-bit timer CNT_HL (FIG. 1), already described, is used for this purpose. At each Hall interrupt Y, timer CNT_HL is loaded with a (previously calculated) initial value t_{TI} , and then counts down until it reaches a value of 0. Upon reaching zero, timer CNT_HL triggers a so-called timer interrupt in μC 11, and the timer is automatically reloaded with the contents t_{AR} of a so-called autoreload register AR (also in μC 11) and then restarted (cf. S302 in FIG. 10).

At a Hall interrupt Y, timer CNT_HL is thus set in such a way that it reaches zero (and thereby triggers an interrupt) at the instant at which commutation is to take place. In FIG. 5 this timer interrupt is labeled T_n , T_{n+1} , etc., and a Hall interrupt is labeled H_n , H_{n+1} , etc.

The manner in which the timer operates is defined by the microcomputer, containing the timer, that is used. The possibility optionally exists of configuring the timer by way of a register of the microcomputer. Possible configurations relate, for example, to the triggering of an interrupt when zero is reached, or to automatic reloading of the timer when zero is reached.

In addition, timer CNT_HL is used here, very advantageously, to measure the Hall length HL (FIG. 4), which is labeled t_{HN} in FIG. 5.

FIG. 5 shows the calculation of the timer start value t_{TI} , depicting signal HALL that is present at the Hall input (FIG. 2) of μC 11, the Hall interrupts H_{n-1} , H_n , etc., the timer interrupts T_{n-1} , T_n , etc., and the Hall lengths $t_{H_{n-1}}$, t_{H_n} , etc. which, in this exemplary embodiment, indicate the time required by the four-pole rotor 39 for one-quarter of a revolution, i.e. for 180° (elec.).

The terms "Hall length HL" and "Hall time t_H " are hereinafter used synonymously. Each Hall time $t_{H_{n+1}}$ begins after and exclusive of a Hall interrupt H_n , and ends with and inclusive of the following Hall interrupt H_{n+1} . The Hall interrupts and timer interrupts are numbered on the basis of the Hall time in which they occur. The Hall time t_{H_n} therefore includes the timer interrupt T_n and (and the end of that time) Hall interrupt H_n .

The values of timer CNT_HL are noted below signal HALL in FIG. 5. Timer CNT_HL counts down between the respective values, e.g. from t_{TI} to 0 in time period 310, and from t_{TI} to t_E in time period 312.

In this example, the timer start value t_{TI} for the Hall time $t_{H_{n+2}}$ is calculated from the Hall length t_{H_n} . To do so, as indicated symbolically at 300, a value t_{TI} is calculated during the Hall time $t_{H_{n+1}}$ using the equation

$$t_{TI} := t_{H_n} - t_{ZW} \quad (6)$$

i.e. an (in this case constant) ignition angle time t_{ZW} is subtracted from the Hall length t_{H_N} . The t_{TI} for the Hall time $t_{H_{N+3}}$ is similarly calculated from the Hall length $t_{H_{N+1}}$, as indicated symbolically at 301, and so forth.

Commutation is thus performed in this fashion at instants T_N , T_{N+1} , T_{N+2} , etc. T_N is earlier than H_N by approximately the time t_{ZW} , i.e. commutation is advanced. Similarly, T_{N+1} is earlier than H_{N+1} , etc. The instants T_N , T_{N+1} , etc. are indicated by upward-pointing arrows.

With reference to FIGS. 17 through 19, a description will be given later on of how, in the case of a four-pole rotor 39, the commutation instant T_{N+4} , for example, can very advantageously be determined by the previous Hall length t_{H_N} ; this results in particularly quiet motor operation. This variant is labeled 304 in FIG. 5, and symbolized by the dot-dash lines 306, 308. With a six-pole rotor, the commutation instant T_{N+6} would analogously be determined by the Hall length t_{H_N} .

FIGS. 6 and 7 show the two possible cases that can occur when the Hall lengths t_H are measured with timer CNT_HL.

Signal HALL that is present at input Hall (FIG. 2) of μC 11 is shown, along with the Hall interrupts H_N and H_{N+1} and a timer interrupt T_{N+1} (in FIG. 7); on the time axis in FIG. 7A are the start values t_B and stop values t_E of timer CNT_HL that are available for the calculation of the Hall length $t_{H_{N+1}}$, which of course is performed only during the following Hall time $t_{H_{N+2}}$. t_B corresponds to the (previously calculated) start value t_{TI} of timer CNT_HL at Hall interrupt H_N , and t_E to the stop value of timer CNT_HL at Hall interrupt H_{N+1} .

Two situations can occur:

The first situation (FIG. 6) is that the motor accelerates so rapidly that the Hall interrupt H_{N+1} occurs before timer CNT_HL reaches a value of 0. In this case, in the Hall interrupt routine triggered by the Hall interrupt H_{N+1} , the stop value of timer CNT_HL is stored in t_E (S202 in FIG. 8A), the motor is commutated, timer CNT_HL and autoreload register AR are reloaded with a value calculated from the Hall length $t_{H_{N-1}}$ (FIG. 5), and timer CNT_HL is restarted (S238 in FIG. 8B). In FIG. 6, a timer interrupt T_{N+1} therefore does not occur during the Hall time $t_{H_{N+1}}$.

In this situation the Hall length $t_{H_{N+1}}$ is calculated using the equation

$$t_{H_{N+1}} := t_B - t_E + t_{CORR} \quad (7)$$

where t_{CORR} is a correction value that is explained in more detail in FIG. 9 with reference to S258 and is depicted in FIG. 6B.

The second situation (FIG. 7A) is that timer CNT_HL reaches zero before the Hall interrupt H_{n+1} occurs. When zero is reached, a timer interrupt T_{n+1} (depicted in FIG. 10) is triggered. At the timer interrupt T_{n+1} , timer CNT_HL is automatically reloaded with the value t_{AR} from autoreload register AR (FIG. 1) and restarted (cf. S302 in FIG. 10). t_B here has the same value as t_{TI} , and thus also corresponds to t_{AR} .

This is illustrated by FIG. 7B. In the time period between an instant shortly after H_n and until T_{n+1} , timer CNT_HL counts down from t_B to zero, and at a value of zero triggers the timer interrupt T_{n+1} . At the beginning of this interrupt, timer CNT_HL is again loaded with t_B (cf. FIG. 10, S302), and then once again counts down during the time until H_{n+1} ; it does not reach a value of 0, however, but only the value t_E . At the Hall interrupt H_{n+1} , timer CNT_HL is again loaded with a (previously calculated) value $t_{B'}$, and the entire procedure repeats.

In the timer interrupt routine invoked by occurrence of the timer interrupt T_{n+1} , commutation is performed if the ignition angle shift function is switched on (cf. FIG. 10, S318, S320, S322), and a flag KD (commutation done) is set to 1 (cf. FIG. 10, S324).

At the subsequent Hall interrupt H_{n+1} , timer CNT_HL is once again stopped and its end time t_E is stored (cf. FIG. 8A, S202). Because the KD flag is set (FIG. 9, S252), the Hall length $t_{H_{n+1}}$ (FIG. 7) is calculated as follows in steps S254 and S258 of FIG. 9:

$$t_1 := t_B - t_E \quad (8)$$

$$t_{H_{n+1}} := t_B + t_1 + t_{CORR} \quad (9)$$

where t_1 is the time between the timer interrupt T_{n+1} and the Hall interrupt H_{n+1} , as depicted in FIG. 7. The value t_B must be added to the value t_1 for calculation of the Hall length $t_{H_{n+1}}$, since between the Hall interrupt H_n and timer interrupt T_{n+1} , timer CNT_HL has counted this value down to zero. Also added, if applicable, is a correction value t_{CORR} which is depicted in FIG.

7B and equals e.g. 40 μ s, and is explained in more detail below with reference to FIG. 9, S258. After the Hall interrupt H_{N+1} and a rotation speed calculation (S274 in FIG. 9), flag KD must be reset ($KD := 0$; cf. S272 in FIG. 9).

QUANTITATIVE EXAMPLE FOR FIG. 7

At H_N , timer CNT_HL is set, for example, to a value (previously calculated in step 303 of FIG. 5) $t_{TI} = t_B = 9800$. t_B thus has a value of 9800 μ s for calculation purposes. At T_{N+1} , timer CNT_HL has reached a value of zero, causes a timer interrupt, and is once again loaded with 9800 and started (S302 in FIG. 10). At H_{N+1} , counter CNT_HL has reached the value $t_E = 9640$.

The value t_{CORR} is assumed to equal 40 μ s. Then, using equations (8) and (9):

$$t_1 := 9800 - 9640 = 160 \mu s$$

$$t_{H_{N+1}} := 9800 + 160 + 40 = 10,000 \mu s$$

In this example the Hall length $t_{H_{N+1}}$ is therefore 10,000 μ s, corresponding to a rotation speed (equation 5, four-pole rotor) of

$$n_i = 15,000,000 / t_{H_{N+1}} = 15,000,000 / 10,000 = 1500 \text{ rpm.}$$

Shortly after H_{N+1} , timer CNT_HL then has loaded into it a new value t_B' that corresponds to the (previously calculated) value t_{TI}' (cf. step 300 in FIG. 5).

FIGS. 8A and 8B are a flow chart for an exemplary embodiment of a preferred Hall interrupt routine, i.e. a rotor position-dependent interrupt routine. This is triggered when predefined rotor positions are reached, and is responsible for determination of the Hall length t_{H_N} and also for commutation, if the latter has not been performed in the timer interrupt routine. All the registers and variables described below in this exemplary embodiment are 16 bits long.

In S202 timer CNT_HL is stopped, and the stop time of timer CNT_HL is stored in t_E .

In the following steps S204-S208, the edge for the next Hall interrupt is set in $\mu C 11$. This is done by checking, in S204, whether $HALL = 1$. If so,

in S206 the edge at which the next Hall interrupt is to be triggered is set to a trailing edge (HIGH -> LOW). Otherwise the edge is set in S208 to a leading edge (LOW -> HIGH).

In S210, a distinction is made between two situations on the basis of flag DE (rotation speed reached):

- If DE = 1, then either a timer interrupt has not occurred, or a timer interrupt has occurred and the ignition angle shift function was switched on. As will be explained later, these both indicate that the motor has reached its rotation speed.

- If DE = 0, then the ignition angle shift function was switched off (SZW = 0) and a timer interrupt has occurred. As will be explained later, this indicates that the minimum rotation speed n_{min} , at which the ignition angle shift function will be switched on, has not yet been reached.

For the situation DE = 0, commutation is performed and timer CNT_HL is set to a fixed value t_{max} (maximum Hall length) which corresponds to the minimum rotation speed n_{min} . For example, if the minimum rotation speed is 300 rpm, then according to equation (4):

$$t_{max} = 15,000,000 / 300 = 50,000 \mu s.$$

In S212 this is done by setting OUT1 and OUT2 to zero.

In S214, autoreload register AR and counter CNT_HL are set to t_{max} (e.g. 50,000). In this example, timer CNT_HL operates at a resolution of 1 μs . Setting CNT_HL to a length of 50,000 μs corresponds to a rotation speed of 300 rpm. Timer CNT_HL is then started.

In S216, flag DE (which was 0) is set to 1, and commutation is performed in S218-222. If HALL = 1 in S218, then in S220 OUT1 becomes HIGH; otherwise, OUT2 is set to HIGH in S222. The program consumed a certain amount of time for the program steps S214 - S218 performed between the deactivation of ports OUT1 and OUT2 in S212 and the activation of OUT1 or OUT2 in S220 or S222, so that a sufficient commutation gap (FIG. 21: t_G) was maintained (e.g. 50 μs).

Lastly, in S224, the Hall interrupt routine terminates.

If $DE = 1$ was true in S210, then in S230 the program requests calculation of the Hall length t_H and the new timer value t_{TI} for the ignition angle shift function. The main program is constructed using a function manager that is described in more detail below in FIG. 15. With the function manager, it is possible to request routines by setting flags, and to cancel the request by resetting the flags. To request the calculation, in S230 a flag FCT_ZWV is set to 1.

A possible alternative to S230 is to perform the calculation directly in the Hall interrupt routine (FIG. 8). This is indicated by S232. If the calculation is performed in S232, then the Hall time $t_{H_{N+1}}$ (e.g. t_{H_4}) can be used to calculate the timer interrupt time t_{TI} which is associated with the Hall time t_{H_N} (e.g. t_{H_5}). If S230 is used, then the Hall time $t_{H_{N-2}}$ (e.g. t_{H_3}), or an even earlier Hall time, is used, as described in FIGS. 17 through 19. If the calculation is performed in the Hall interrupt (S232), then S230 is omitted. The description below refers to a version without S232.

S234 (FIG. 8B) checks whether flag KD (commutation done) is equal to 1. If $KD = 1$, then a timer interrupt occurred in the Hall time belonging to the Hall interrupt, as depicted in FIG. 7A for H_{N+1} , and the ignition angle shift function was switched on. In this case, commutation has already been performed in the timer interrupt (T_{N+1} in FIG. 7A), and execution branches directly to S238.

If $KD = 0$ in S234, then a timer interrupt did not occur in the Hall time belonging to the Hall interrupt, i.e. the situation is as shown in FIG. 6. In S236 the commutation gap (t_G in FIG. 21) is started by setting both ports $OUT1$ and $OUT2$ to zero, i.e. energy delivery to stator winding 38 (FIG. 1) is briefly discontinued. The case in which a timer interrupt has occurred, but no commutation occurred during that interrupt because the ignition angle shift function was inactive, is dealt with in the branch below S210 for $DE = 0$ (FIG. 8A).

In S238, autoreload register AR and timer CNT_HL are loaded with the value t_{TI} calculated in the ignition angle calculation function described below (FIG. 9 or 19), and timer CNT_HL is started.

In S240, the ignition angle shift function is activated by setting the value of flag SZW to 1, since the necessary rotation speed -- in this instance, for example, the rotation speed of 300 rpm -- has been reached (DE = 1).

Step S242 once again checks, based on flag KD (commutation done), whether commutation has already taken place. If not (KD = 0), S244 checks on the basis of signal HALL whether either OUT1 has been set to HIGH in S246, or OUT2 has been set to HIGH in S248. The commutation gap (t_G in FIG. 21) is generated, in this context, by steps S238 through S244 located between the deactivation of ports OUT1 and OUT2 (S236) and their activation.

Lastly, execution leaves the Hall interrupt routine at S250.

FIG. 9 is a flow chart of an example of an ignition angle calculation routine which is invoked (cf. S230 in FIG. 8A), once the minimum rotation speed has been reached, in each Hall interrupt routine (FIG. 8) by setting request bit FCT_ZWV (FIG. 15). Ignition angle calculation is invoked by function manager 190 (FIG. 15) if no higher-priority tasks are being requested. It is therefore impossible to say exactly when this calculation takes place. The instants B_n (e.g. in FIGS. 12A and 12B) at which the ignition angle calculation is performed are therefore not precisely determined, but rather represent examples of instants.

Note that the calculation of the Hall length t_H always applies to a previous Hall time. For example, the Hall length $t_{H_{n-1}}$ is calculated during the Hall time t_{H_n} .

S252 checks, on the basis of flag KD, whether a commutation has been performed (cf. S234 in FIG. 10) in the timer interrupt (e.g. T_{n+1} in FIG. 7). If so (KD = 1), then as defined by S254, as shown and described in FIG. 7, the Hall length t_H is determined from the beginning time t_B and the time t_1 , which is the difference between t_B and t_E . If not (KD = 0), then as defined

in S256 the Hall length t_H is determined from the difference between t_B and t_E (cf. FIG. 6).

In S258, a correction time t_{CORR} is added to the Hall length t_H . This results from the fact that timer CNT_HL is halted at S202 at the beginning of the Hall interrupt routine (FIGS. 8A and 8B), but is not started again until later, in S232. The Hall routine has consumed a certain amount of time by then, which is then added as t_{CORR} (e.g. 40 μs) in order to obtain the exact Hall length t_H in S258.

In S260, the instantaneous Hall length t_H is stored in the true Hall value t_i , so that the present true Hall value is available to all the other program sections (e.g. the control system) as an indicator of the instantaneous rotation speed.

In S262, the present start time of timer CNT_HL is saved to t_B , so that it is available for the calculation of t_{TI} during the next Hall time.

A check of the rotation speed is then made, since an ignition angle shift must be performed only above a predefined minimum rotation speed n_{min} , e.g. 300 rpm. For that purpose, S264 ascertains whether $t_H > t_{SZW}$. t_{SZW} (e.g. 49,664 μs , corresponding to 0xC200) is the maximum Hall length at which an ignition angle shift is to be performed. If t_H is greater than t_{SZW} , the motor is too slow, and the ignition angle shift function is deactivated in S266 ($SZW := 0$).

The commutation instant t_{TI} , i.e. the instant at which a timer interrupt is to be triggered, is calculated in S268. This is done in S268 by subtracting a value t_{ZW} , namely the length of time by which the commutation instant is to be advanced, e.g. 200 μs . This can be a constant value, or a value that depends on a motor parameter. This value t_{ZW} can be modified externally via bus 30 (FIG. 14). If $t_{ZW} = 0$, then the ignition angle shift function is switched off.

The ignition angle calculation routine has now been executed. The FCT_ZWV request bit (FIG. 15) is set to zero in S270; in S272 flag KD is reset to zero so that it can be used for the next Hall time; and in S274, request bit FCT_RGL (FIG. 15) for the motor control system is set so that it is requested.

The principal tasks of the ignition angle calculation routine as shown in FIG. 9 were therefore to determine the duration of the previous Hall length (S258), calculate the commutation instant for the next Hall time (S268), and request the control system (S274).

FIG. 10 is a flow chart of an example of a timer interrupt routine which provides motor control and is triggered when timer CNT_HL, initialized and started in the previous Hall interrupt, has counted down to zero before the next Hall interrupt is triggered (cf. FIGS. 7A and 7B).

Upon reaching a value of 0, timer CNT_HL is loaded (in S302) with the value t_AR of autoreload register AR and restarted, since it is used simultaneously to calculate the Hall length t_H. This step is executed automatically by μ C 11 when this counter reaches zero, and is incorporated into the flow chart only for illustration.

S304 checks, on the basis of flag SZW, whether the ignition angle shift function is active. If it is not active, this means the motor is running more slowly than the minimum rotation speed. This is evident from the fact that if the timer interrupt has taken place when the ignition angle shift function is inactive, autoreload register AR and timer CNT_HL are set, in S214 of the Hall interrupt routine, to the maximum Hall length t_max corresponding to the minimum rotation speed n_min. If the timer interrupt (T_{n+1} in FIG. 7) nevertheless takes place before the Hall interrupt (H_{n+1} in FIG. 7), then the minimum rotation speed n_min has not been reached and flag DE (rotation speed reached) is set to zero, and execution leaves the timer interrupt routine at S308.

If the ignition angle shift function is active (SZW = 1), execution branches from S304 to S310, where the two ports OUT1 and OUT2 are set to 0 at the beginning of the commutation gap.

Steps S312 through S316 constitute a program loop which creates a commutation gap (t_G in FIG. 21) of sufficient length. For this purpose, in S312 a counter DEL_CNT has a delay value t_DEL assigned to it, e.g. the number 5. In S314, counter DEL_CNT is decremented by 1; S316 then checks whether DEL_CNT has reached a value of zero, i.e. whether the delay loop has been

completely executed. If not, execution branches back to S314 and the loop continues. If one pass through the loop requires, for example, 10 μ s, then the aforesaid values yield a delay of 50 μ s during which ports OUT1 and OUT2 each have an output signal of 0, creating the commutation gap t_G .

5 Commutation then takes place in the usual way, as already described in FIG. 8A, S218 through S224. If the Hall value $HALL = 1$ in S318, then OUT1 is set to HIGH in S320; otherwise OUT2 is set to HIGH in S322. Commutation has thus been performed -- with ignition angle shifting -- in the timer interrupt and before the Hall interrupt, i.e. in FIG. 7 at instant T_{x+1} before the Hall interrupt H_{x+1} .

10 In S324, flag KD (commutation done) is set to 1 so that the Hall interrupt routine and the ignition angle calculation routine can recognize that fact, and execution then leaves the Hall interrupt routine at S326.

15 FIG. 11 shows, by way of example, a signal $HALL$ along with the instants of the Hall interrupts H_x and the timer interrupts T_x during acceleration of a motor according to the present invention. The Hall times t_{H_x} that are located between the respective Hall interrupts H_{x-1} and H_x become increasingly shorter because the motor is accelerating. A timer interrupt does not occur during each Hall time. In this example an ignition angle calculation is performed in t_{H_2} and in the subsequent Hall times; but because of the acceleration of the motor, in this example only the timer interrupts T_1 , T_{10} , and T_{11} occur, since the rotation speed becomes approximately constant only as of t_{H_8} .

20 FIGS. 12A and 12B show the profile shown in FIG. 11 at enlarged scale and with additional explanations.

25 FIGS. 12A and 12B show an example of changes over time during startup of a motor according to the present invention, intended to illustrate the interplay between the Hall interrupt, the ignition angle calculation, and the timer interrupt.

The following variables are used in FIGS. 12A and 12B:

DE: "Rotation speed reached" flag
KD: "Commutation done" flag
SZW: "Start ignition angle shift" flag
5 t_AR: Value in autoreload register AR (FIG. 1)
CNT_HL: Timer for timer interrupt and calculation of Hall length
t_E: Stop time (end time)
t_H: Hall length (Hall time)
t_B: Start time (beginning time)
10 OUT1: Port of μ C 11 for energization of the motor
OUT2: Port of μ C 11 for energization of the motor.

Signal HALL at the Hall input of μ C 11 is plotted. The Hall lengths t_H are respectively located between the Hall interrupts which surround them, e.g. $t_{H_2} = 40$ ms between H_1 and H_2 , $t_{H_3} = 35$ ms between H_2 and H_3 , etc. Hall
15 interrupts are indicated in each case as H_N , timer interrupts as T_N , and executions of the ignition angle calculation function as B_N , where N is the index of the associated Hall length t_{H_N} .

Located below signal HALL are certain important variables which are used in the program that executes in μ C 11. For space reasons, times are indicated in ms, although the program operates internally with time in μ s. Some of the variables are initialized when the motor is started (INIT column). t_{TI} and t_B are initialized at 50 ms. This corresponds to a rotation speed of 300 rpm, and it is only above this rotation speed that, in this exemplary embodiment, the ignition angle shift function is switched on. DE and KD are set to 0, since the requisite rotation speed has at first not been reached; and SZW is also initialized at zero because the ignition angle shift function is switched off.
20
25

At the first Hall interrupt H_0 , autoreload register AR and timer CNT_HL are loaded for the first time with a value of 50 ms, and timer CNT_HL is started. The Hall length t_{H_1} is 60 ms, so that the timer interrupt T_1 occurs before Hall interrupt H_1 .
30

Since the ignition angle shift function is switched off ($SZW = 0$), all that happens in the timer interrupt routine is that the value DE is set to 0 ($S306$ in FIG. 10). This indicates to the Hall interrupt that the motor has not yet reached the minimum rotation speed n_{min} , since the Hall length t_{H_1} is longer than the maximum Hall length t_{max} (which corresponds to the minimum rotation speed n_{min}). Timer CNT_HL is automatically loaded with the autoreload value t_{AR} of 50 ms, and started.
35

The Hall interrupt H_1 invokes the Hall interrupt routine (FIG. 8). The stop time t_E of 40 ms, which results from the fact that 10 ms has elapsed between the timer interrupt T_1 (at which timer CNT_HL was once again set to 50 ms) and the Hall interrupt H_1 , is saved. Since $DE = 0$, commutation is performed at instant H_1 , t_{AR} and CNT_HL are loaded with a value of 50 ms, and timer CNT_HL is started. DE is set to 1. No calculation is requested.
40

During the Hall length t_{H_2} , the motor reaches, on average, the minimum rotation speed of 300 rpm for the first time, so that the Hall interrupt H_2 is triggered before timer CNT_HL has counted down to zero. A timer interrupt T_2 therefore does not take place.

5 In the Hall interrupt routine, at Hall change H_2 the stop time t_E of timer CNT_HL (= 10 ms) is saved. Because a timer interrupt did not occur during the Hall length t_{H_2} , DE has retained its value $DE = 1$. The Hall interrupt routine recognizes from this that the rotation speed of 300 rpm has been exceeded. In the Hall interrupt routine, the ignition angle calculation routine (FIG. 9) is requested, and ignition angle shifting is activated by SZW
10 := 1. Because commutation has not yet occurred within the Hall length t_{H_2} ($KD = 0$), commutation is performed during the Hall interrupt routine at instant H_2 . Because an ignition angle calculation has not yet been performed, autoreload register AR and timer CNT_HL are loaded with the value t_{TI} that
15 was initialized at 50 when the motor started, and timer CNT_HL is restarted.

During the Hall length t_{H_3} , the calculation of the ignition angle shift is performed for the first time. A timer interrupt has not occurred ($KD = 0$), so that the Hall length t_{H_2} , calculated during the Hall length t_{H_3} , is determined (from $t_B = 50$ ms and $t_E = 10$ ms) as $t_H = 40$ ms. With an ignition angle shift time $t_{ZW} = 0.2$ ms, this yields a timer interrupt time of 39.8 ms. The timer start time of the Hall time t_{H_3} is saved in t_B .

The Hall interrupt routine for Hall interrupt H_3 proceeds similarly to the Hall interrupt routine for Hall interrupt H_2 , since the motor is still

accelerating and the Hall interrupt occurs before timer CNT_HL reaches a value of 0. A timer interrupt therefore does not occur in this Hall time. This is also the case in Hall interrupts H_4 , H_5 , H_6 , and H_7 . The ignition angle calculation routines B_4 , B_5 , B_6 , and B_7 are also invoked in the respective Hall times.

In the Hall time t_{H_8} , the motor finally reaches its nominal rotation speed of 1500 rpm which corresponds to a Hall length of 10 ms. Since, in this example, the timer interrupt time t_{TI} for the Hall time t_{H_n} is always calculated during the Hall time $t_{H_{n-1}}$ from the Hall length $t_{H_{n-2}}$, there is a "lag" of two Hall times, i.e. the first Hall time at which timer CNT_HL is started with the correct timer interrupt time t_{TI} is $t_{H_{10}}$, since the Hall time t_{H_8} was the first Hall time with 10 ms, and the result of the Hall length calculation for the Hall time of t_{H_8} is not used until $t_{H_{10}}$.

During the Hall time $t_{H_{10}}$, the ignition angle calculation B_{10} is performed normally. The start value t_{TI} for autoreload register AR and timer CNT_HL during the Hall interrupt routine for H_8 was 9.8 ms.

A timer interrupt T_{10} is therefore triggered 9.8 ms after the Hall interrupt H_8 . Timer CNT_HL is automatically loaded with the value t_{AR} (9.8 ms), and restarted. The ignition angle shift function is switched on (SZW = 1), so that commutation occurs in the timer interrupt routine (T_{10}). Flag KD is set to 1 in order to indicate to the next Hall interrupt routine (for H_{10}) and to the ignition angle calculation function that commutation has taken place.

In the Hall interrupt routine for the Hall interrupt H_{10} , the stop value of timer CNT_HL is saved in t_E , the ignition angle calculation routine is requested, autoreload register AR and timer CNT_HL are loaded, and timer CNT_HL is started. Since commutation has already taken place in the timer interrupt routine for the timer interrupt T_{10} , no further commutation occurs.

The subsequent Hall times $t_{H_{11}}$, etc. proceed similarly to $t_{H_{10}}$ if the true or reference rotation speed of the motor does not change.

MOTOR CONTROL SYSTEM

FIG. 13 shows the portion of the circuit important for controlling and driving the motor. Parts that are identical or functionally identical to those in previous Figures are labeled with the same reference characters as therein, and usually are not described again.

The assignment of the terminals of $\mu\text{C } 11$ is once again evident from FIG. 3. Outputs OUT1 and OUT2 of $\mu\text{C } 11$ control npn transistors 141, 142, 143, and 144, connected as an H-bridge 37.

An output RGL of $\mu\text{C } 11$ is connected via a resistor 123 to a capacitor 124. If RGL is set to HIGH, capacitor 124 is charged; if RGL is LOW, then the capacitor is discharged; and if RGL is at TRISTATE, capacitor 124 is decoupled from RGL and retains its voltage. Without current limiter 44, which is described below, node 125 could be connected directly to the positive input of comparator 120.

If npn transistor 150 is not conductive (i.e. if current limiter 44 is inactive), a voltage identical to that of capacitor 124 is established via resistor 126 at a smaller capacitor 127. The voltage at the positive input of comparator 120 can thus be influenced via output RGL of $\mu\text{C } 11$.

A triangular signal generated by a sawtooth oscillator 35 is present at the negative input of comparator 120. Sawtooth oscillator 35 has a comparator 130. A positive feedback resistor 132 leads from output P3 of comparator 130 to its positive input; similarly, a negative feedback resistor 131 leads from output P3 of comparator 130 to the negative input of comparator 130. A capacitor 135 is present between the negative input of comparator 130 and ground 100. The output of comparator 130 is moreover connected via a resistor 133 to +Vcc. The positive input of comparator 130 is connected via two resistors 134 and 136 to +Vcc and to ground 100, respectively.

Reference is made to DE 198 36 882.8 (internal: D216) for an explanation of the manner of operation of sawtooth generator 35 and the way in which output RGL of $\mu\text{C } 11$ is controlled by $\mu\text{C } 11$.

If the voltage of the triangular signal at the negative input of comparator 120 is below that of the reference signal at the positive input of comparator 120, output OFF of comparator 120 is then HIGH, and the lower transistors 141 and 143 can be switched on and off, via logical AND elements 147 and 148, by OUT1 and OUT2, respectively. If the voltage of the triangular signal is above that of the reference signal, output OFF of comparator 120 is then LOW and stator winding 38 therefore cannot be energized.

The voltage at capacitor 124 and therefore also at capacitor 127 thus establishes the so-called pulse duty factor, i.e. the ratio between the time the output of comparator 120 is at HIGH during a period of the triangular signal, and one entire period. The pulse duty factor can be between 0% and 100%. If the motor rotation speed is too high, for example, capacitor 124 is discharged via RGL and the pulse duty factor is thus reduced. All this is referred to as pulse width modulation (PWM). The purpose of pull-up resistor 128 is to pull the open collector output OFF of comparator 120 to +Vcc when it is HIGH.

To allow the motor to be started when switched on, capacitor 124 is charged via RGL for a predefined period of time at initialization, so that the voltage at capacitor 127 reaches the necessary minimum value for activation of comparator 120 and thus of bridge 37.

A current limiter 44 is implemented by the fact that the current in stator winding 38 flows through a measurement resistor 140 to ground 100. The higher the current through resistor 140, the higher the voltage at it and thus also the higher the potential at node 149.

When the potential at 149 reaches a specific value, transistor 150 becomes conductive and reduces the voltage at capacitor 127, and the pulse duty factor at the output of comparator 120 thereby becomes lower. Resistor 126 prevents the large capacitor 124 from also being discharged during current limitation, and accelerates current limitation because the small capacitor 127 can be discharged more quickly. After active current limitation ends, the smaller capacitor 127 is recharged by the large capacitor 124 and is thus set

to its voltage. Resistor 126 and capacitor 127 therefore ensure that current limiter 44 possesses a higher priority than the control system.

Current limiter 44 has a filter member made up of a resistor 151 and a capacitor 152 to ground, followed by npn transistor 150 which, when the voltage at its base is sufficiently high, pulls the positive input of comparator 120 to ground 100. Behind this follows a further filter member comprising resistors 153 and 155 and capacitor 154.

Reference is made to DE 198 26 458.5 (internal: D215) for a description of an alternative form of current limiter. As therein, it can also be constructed using a comparator and can be program-controlled.

EEPROM FUNCTION

FIG. 14 shows the portion of the circuit that is relevant to EEPROM 26 and bus interface 30. The pin assignment of μ C 11 is again evident from FIG. 3. Parts identical or functionally identical to those in previous figures are labeled with the same reference characters as therein. EEPROM 26 is, for example, an AT24C01A two-wire serial CMOS EEPROM (ATMEL).

EEPROM 26 receives signal ESDA (FIG. 2) of μ C 11 at its data input SDA, and signal ESCL at its SCL input. Both lines are connected via resistors 172, 173 to +Vcc.

Write-protect input WP of EEPROM 26 is connected to pin CS (Chip Select) of μ C 11. If CS is HIGH, EEPROM 26 is write-protected; if CS is LOW, data can be written into EEPROM 26. Terminals VSS, A0, A1, and A2 of EEPROM 26 are connected to ground 100, and terminal VCC of EEPROM 26 is connected to +Vcc.

Lines ESDA and ESCL thus represent the serial bus between μ C 11 and EEPROM 26, which here is operated as an IIC bus.

EEPROM 26 is normally programmed once at the factory via bus interface 30, but reprogramming is possible at any time. Alternatively, the motor can

also be operated without bus 30; EEPROM 26 is then programmed by means of a known apparatus before it is introduced into the motor.

Bus interface 30 works with an IIC bus. It has a DATA line with a terminal 160, which is connected via a resistor 162 to terminal SDA of μC 11. From terminal SDA, a resistor 165 goes to +Vcc and a capacitor 167 goes to ground 100. Terminal SDA is also connected to the emitter of a pnp transistor 168 whose collector is connected to ground 100 and whose base is connected via a resistor 169 to terminal N16 of μC 11.

Bus interface 30 also has a CLOCK line with a terminal 161, which is connected via a resistor 163 to terminal SCL of μC 11. From terminal SCL of μC 11, a resistor 164 goes to +Vcc and a capacitor 166 goes to ground 100.

The purpose of the circuit with pnp transistor 168 is to connect both output N16 and input SDA of μC 11 to the bidirectional DATA line of the IIC bus.

For a more detailed description of EEPROM 26, bus interface 30, and their programming, the reader is referred to DE 198 26 458.5 (internal: D215).

With bus interface 30, it is possible to modify values in EEPROM 26. For example, the minimum rotation speed n_{min} above which commutation with an ignition angle is to be activated can be modified by setting the value t_{SZW} in the EEPROM, thus changing the configuration of the motor. The ignition angle time t_{ZW} can also, for example, be changed.

FUNCTION MANAGER

FIG. 15 shows a flow chart with one possible embodiment of the overall program that executes in μC 11. After the fan is turned on, an internal reset is triggered in μC 11. Initialization of μC 11 occurs in S600. For example, parameters are transferred from EEPROM 26 into the RAM of μC 11.

After initialization, execution branches into the aforementioned

function manager 190, which begins in S602. This controls the execution of the individual subprograms and determines their priorities.

The functions executed first are those that are time-critical and must be executed at each pass. These include the communication function COMM in S602, since at a baud rate of, for example, 2K, IIC bus 30 (FIG. 14) must be checked every 250 μ s.

FIG. 16 shows an example of a function register 195 in which one bit is reserved for each additional function.

In this example, function register 195 is 1 byte long; beginning with the least significant bit (LSB), the following request bits are defined for the requestable functions explained below:

- Bit 1: FCT_ZWV for the ignition angle calculation routine;
- Bit 2: FCT_RGL for a control routine of any kind.

The remaining bits are reserved for additional requestable functions that can be inserted into function manager 190 as necessary.

If a specific requestable function is to be requested by another function or by an interrupt routine, the bit of the function being requested is set to 1. That function is executed the next time function manager 190 performs a pass and finds no other requestable function with a higher priority.

Once a requested function has been processed, it sets its bit (FIG. 16) back to zero, e.g. FCT_RGL := 0.

In FIG. 15, after S602 a check is made, in a predetermined sequence starting with the most important requestable function, as to whether each function's request bit is set. If such is the case for a function, it is performed, and execution then branches back to the beginning (S602) of function manager 190. The sequence in which function register 195 is checked defines the prioritization of the requestable functions. The higher up a function is located in function manager 190, the higher its priority.

The functions that are invoked must be so short that their execution time, added to the functions that are always performed (here S602) and the interrupt routines, is never longer than the maximum permissible time between two polls of IIC bus 30. In the example above with a baud rate of 2K and a maximum permissible time of 250 μ s, the maximum execution time for the functions invoked in S610 or S614 is approx. 100 μ s.

S610 checks whether request bit FCT_ZWV for the ignition angle shift function is set, i.e. has a value of 1. If it is set, execution then branches to S612 and the ignition angle calculation routine (FIG. 9 or 19) is performed. Before terminating, the ignition angle calculation routine resets its request bit FCT_ZWV, and requests the control routine in S274 by setting request bit FCT_RGL.

If S610 finds that FCT_ZWV was not set, S614 then checks whether FCT_RGL is set. If so, a control routine for controlling the motor rotation speed is invoked in S618.

If neither of the bits checked in S610 and S614 was set, execution then branches back to S602, and the functions that are performed at each pass of function manager 190 are invoked again.

At 620, FIG. 15 also symbolically shows a Hall interrupt, which has the highest priority L1 (level 1). A Hall interrupt has this high priority because accurate sensing of the Hall signals is very important for quiet operation of motor 39. It interrupts all processes of function manager 190, as symbolized by an arrow 621.

Shown below the Hall interrupt (at 622) is a timer interrupt. This has a lower priority L2 and interrupts all the processes below it, as indicated by arrow 623. Exact commutation is also very important for quiet motor operation, and timer interrupt 622 therefore has the second-highest priority.

If a Hall interrupt and timer interrupt were requested simultaneously, they would be executed in the order of their priority.

The COMM function has the next-lower priority L3, since data must never be lost during communication via bus 30.

The ZWV function, which can be requested in S230 and is depicted in FIG. 9 (or 19), has the next-lower priority L4.

The RGL function (S614) has the lowest priority L5, since the rotation speed of a motor usually changes slowly because of its mechanical inertia, so that the control function is, in most cases, not time-critical. If appropriate, however, the sequence of steps S610 and S614, and thus their priorities, can also be interchanged.

It is possible in this fashion to classify the various "needs" of motor 39 into a predefined hierarchy, and to use the resources of μC 11 optimally for operation of the motor.

Ignition angle shifting function, taking into account magnetization errors in rotor 39

FIG. 17 shows a four-pole external rotor 39. It has four radially magnetized poles 534, 535, 536, 537 which are separated from one another in the manner depicted by (symbolically indicated) transition regions 530 through 533. As an example, so-called trapezoidal magnetization is assumed to be present (cf. FIG. 18A).

Because of inhomogeneities in the magnet material and because of unavoidable errors in the magnetization apparatus (not shown), the profile of the magnetic flux density, especially in the transition regions 530 through 533, is not exactly defined, but rather differs slightly from one rotor to another.

If it is assumed that rotor 39 rotates past Hall generator 40 in the direction of arrow 540, what is obtained at Hall generator 40 is a Hall voltage u_H whose characteristic is shown in FIG. 18A (greatly exaggerated for illustrative purposes). Portion 534' of this Hall voltage u_H is generated by rotor pole 534 (North pole) and is slightly too short, i.e. the zero transitions of this Hall voltage are located at 0° (elec.) and approximately 170° (elec.) rather than, as intended, at 0° (elec.) and exactly 180° (elec.).

Portion 535' of the Hall voltage is generated by rotor pole 535. It begins at approximately 170° (elec.) and ends at approximately 370° (elec.), and is too long.

Portion 536' is generated by rotor pole 536 and extends from approximately 370° (elec.) to approximately 550° (elec.); it thus has the correct length but not the correct phase position.

Portion 537' is generated by rotor pole 537 and extends from approximately 550° (elec.) to 720° (elec.), i.e. is slightly too short. In this motor, 720° (elec.) corresponds once again to 0° (elec.) because rotor 39 has then performed one complete revolution, and the voltage curve then repeats as indicated in FIG. 18A at 534'A.

FIG. 18B shows the associated signal HALL, which is a mirror image of the magnetization errors just explained; in other words, its first segment 534" is too short, its second segment 535" is too long, its third segment 536"

is phase-shifted, and its fourth segment 537" is too short. A segment 534"A that corresponds (at constant rotation speed) to segment 534" begins after the 720° (elec.) angle.

Segments 534" and 537" therefore simulate a rotation speed that is too high, and segment 535" simulates a rotation speed that is too low.

If segment 534" is used to calculate time t_{TI} for segment 536", as was explained in the context of the exemplary embodiment above, commutation in segment 536" will then take place too early.

If segment 535" is used to calculate time t_{TI} for segment 537", commutation there will take place too late.

This can result in irregular motor operation, and in increased motor noise.

According to the invention, therefore, a segment of signal HALL is used in order to calculate time t_{TI} for the segment one rotor revolution later, as shown symbolically and by way of example in FIG. 5 with the reference characters 304, 306, 308 for a four-pole rotor. In FIG. 18B, for example, Hall length t_{H_x} of segment 534" is used to calculate time t_{TI} for segment 534"A, as shown symbolically and by way of example at 542, 544, 546. These errors

then do not occur, since at a constant rotation speed segments 534" and 534"A, for example, are identical, so that errors cannot add up.

FIG. 19 shows a corresponding modified ignition angle calculation routine for commutation with ignition angle shifting, a compensation for magnetization defects of rotor 39 being performed in the preferred manner described. All parts that have already been presented in FIG. 9 receive the same reference characters as therein, and are therefore not described again. The reader is referred to the description in that context.

In step 268', instead of a direct calculation of timer start value t_{TI} (cf. S268 in FIG. 9), two variables t_4 and t_3 are additionally used to buffer the calculated timer start values t_{TI} . The timer start value t_{TI} used for the next Hall time t_{H_n} is assigned the timer start value t_4 calculated from the Hall length $t_{H_{n-4}}$.

The calculated timer start values are then shifted so that they are present in the correct variables for the next ignition angle calculation. The value t_3 that was calculated from the Hall length $t_{H_{n-3}}$ is shifted to t_4 , and the timer start value calculated in the present ignition angle calculation ($t_H - t_{ZW}$) is stored in t_3 . (In this case t_H is the Hall length $t_{H_{n-2}}$.)

A new step S267 is also inserted. When the ignition angle shift function is deactivated ($SZW := 0$ in S266), memory variables t_4 and t_3 are set to a value of 50,000 so that they have a defined state.

FIG. 20 shows an example of a Hall interrupt routine for a commutation according to the present invention without ignition angle shifting, as depicted in FIG. 4. At each Hall interrupt (Y in FIG. 4), the program that is currently running is interrupted, the so-called environment of $\mu C 11$ (e.g. the stack pointer and register) is stored, and the interrupt routine pertinent to the interrupt is invoked. When the interrupt routine has executed, it issues a RETI (return from interrupt) command. The environment of $\mu C 11$ is then restored to what it was before the interrupt, and the interrupted program continues to execute.

In this exemplary embodiment, the Hall length HL (Fig. 4) is again measured using the 16-bit timer CNT_HL, which continuously counts down beginning from a predefined start value and, if counting continues, jumps back to its maximum value upon reaching zero; in other words, it behaves like a ring counter. Here again, this timer is a component of μ C 11. The Hall length HL can be used here, for example, for a rotation speed control function.

In S702, the true Hall length HL (cf. FIG. 4) is determined. A present timer value t_E (FIG. 4) is read out from timer CNT_HL, and a stored "old" timer value t_O (FIG. 4; the instant of the previous timer interrupt Y) is subtracted in order to calculate the Hall length HL. This is done by calculating $t_E - t_O$ and taking the two's complement of the result. This always yields the correct counter difference provided the counter has continued by no more than half its maximum value.

The present timer value t_E is then stored in t_O (S702). The resolution of timer CNT_HL used in this exemplary embodiment is 1 μ s, and the Hall length HL is therefore provided in μ s.

For example, if $t_O = 45,000$ and $t_E = 35,000$, the result is a Hall length $HL = (45,000 - 35,000) = 10,000$, corresponding to 10,000 μ s.

Commutation is performed in the steps that follow. S704 checks whether $HALL = 1$ (HIGH). If $HALL = 1$, then in S710 OUT2 is set to LOW. OUT1 and OUT2 are now LOW, and in S712 a commutation gap time is inserted to prevent a short circuit in bridge circuit 37 during commutation. The commutation gap has a duration of, for example, 50 μ s. In S714, OUT1 is set to HIGH. Lastly, in S716 port Hall of μ C 11 is configured for the edge at which it will trigger a Hall interrupt HALL_INT. The edge can be set so that an interrupt is triggered either at the HIGH to LOW transition (trailing edge) or at the LOW to HIGH transition (leading edge). Since the Hall signal is HIGH in the branch from S710 to S716, port HALL must be set for a trailing-edge (i.e. HIGH to LOW) interrupt so that a Hall interrupt is again triggered at the next Hall change. This is done in S716.

If $HALL = 0$ (LOW) in S704, then commutation occurs analogously in reverse fashion in S720, S722, S724, and $HALL_INT$ is set in the reverse direction in S726. In S730, execution leaves the Hall interrupt routine shown in FIG. 20.

5 FIG. 21 schematically shows the commutation process for $n > 300$ rpm, for example 2000 rpm, i.e. with ignition angle shifting.

FIG. 21A shows the rotor position signal $HALL$, which triggers a rotor position-dependent interrupt (FIG. 8), i.e. a Hall interrupt as indicated by Y in FIG. 4, at each of the points H_H , H_{H+1} , H_{H+2} .

10 Beginning at Hall interrupt H_H , timer CNT_HL measures the time t_{TI} , which is calculated according to equation (6) from the values t_{HN} and t_{ZW} . As already indicated, the value t_{ZW} can be modified by way of bus 30.

At time T_{H+1} , timer CNT_HL reaches a value of 0 and triggers a motor control interrupt routine as shown in FIG. 10, i.e. a timer interrupt.

15 As shown in S310 in FIG. 10, at time T_{H+1} signals $OUT2$ (FIG. 21B) and $OUT1$ (FIG. 21C) are both set to zero, i.e. current delivery to winding 38 is discontinued; and after a commutation gap t_G (implemented by program steps S312, S314, S316), at S322 signal $OUT1$ is set to HIGH (since $HALL = 1$), while $OUT2$ remains LOW, as stored in step S310. Because $OUT1 = HIGH$, transistors 141 and 144 in FIG. 1 become conductive.

20 Similarly, at time T_{H+2} step S310 of the routine shown in FIG. 10 causes the two signals $OUT1$ and $OUT2$ to be set to LOW; and then after commutation gap t_G , the value of $OUT2$ is set to HIGH because $HALL = 0$ (cf. steps S318, S322 of FIG. 10) while $OUT1$ retains its LOW value that was stored in step S310. As
25 a result, transistors 142 and 143 in FIG. 1 become conductive.

FIG. 22 at the bottom shows signal $HALL$, and at the top shows current i_M (FIG. 1) in the single stator winding 38. In FIG. 22, the ignition angle

shift function is switched off, i.e. $t_{ZW} = 0$. It is apparent that after a commutation at instant H_z (change in signal \overline{HALL}), current i_M changes only slowly. In this case it therefore achieves only a low amplitude, i.e. motor M generates only a low output.

FIG. 23 again shows signal \overline{HALL} at the bottom, and above it current i_M (FIG. 1), but with earlier commutation ("ignition advance"), i.e. current i_M is commutated earlier than the Hall change H_z by a value equal to time t_{ZW} . It is clearly apparent that current i_M changes very rapidly immediately after commutation and reaches a substantially higher amplitude than in FIG. 22, i.e. in this case motor M generates a higher output and can therefore achieve a higher rotation speed. In FIG. 23, commutation occurs approximately 15° (elec.) before a change in signal \overline{HALL} .

The table below shows typical examples of values of the components used:

Capacitors:

135	1.5 nF
127, 152	10 nF
99, 110, 166, 167	33 nF
154	100 nF
Tantalum capacitor 124	3.3 μ F

Resistors:

140	3 ohms
162, 163	47 ohms
153, 155	1 kohms
133, 136	2.2 kohms
106	3.3 kohms
164, 165	4.7 kohms
123, 131, 132	10 kohms
172, 173	22 kohms
114, 126	33 kohms
134	47 kohms
101, 112, 128, 169	100 kohms
Npn transistor 150	BC846
Pnp transistor 168	BC856B
Comparators 108, 120, 130	LM2901D
Hall sensor 40	HW101A
EEPROM 26	AT24C01A two-wire serial CMOS EEPROM (ATMEL)
Microcontroller 11	COP842CJ (Nat. Semicond.)

CLAIMS

1. An electronically commutated motor comprising
a stator, a rotor (39), and a program-controlled microprocessor or microcontroller (11), hereinafter called a microprocessor, serving to control commutation of the motor;
an apparatus for sensing a time variable (t_H) that is substantially inversely proportional to the rotation speed of the rotor (39);
an apparatus for calculating a time (t_{TI}) dependent on that time variable (t_H);
an apparatus for triggering a motor control interrupt routine (FIG. 10) at a time offset (t_{TI}) from a predefined rotor position, that offset corresponding to the time (t_{TI}) dependent on the sensed time variable (t_H);
wherein the motor control interrupt routine contains program steps (S310, S318, S320, S322) for effecting a commutation of the motor.
2. The motor according to claim 1, wherein
the motor control interrupt routine (FIG. 10) contains program steps (S304, S306) which prevent a commutation from being effected if the time (t_{TI}) dependent on the sensed time variable is greater than a time span (t_H) presently required by the rotor (39) to travel through a predefined angular distance.
3. The motor according to claim 2, having an apparatus which triggers a rotor position-dependent interrupt routine (FIG. 8) at predefined rotor positions.
4. The motor according to claim 3, wherein
a timer (CNT_HL), controllable by the rotor position-dependent interrupt routines (FIG. 8), is provided, in order to sense the time variable that is substantially inversely proportional to the rotation speed of the rotor.
5. The motor according to claim 4, wherein
the timer (CNT_HL) is also configured to trigger a motor control interrupt routine (FIG. 10).
6. The motor according to claim 5, wherein
the timer (CNT_HL) is loadable, during a rotor position-dependent interrupt (FIG. 8), with a first predefined count value (t_B) which corresponds to the time offset (t_{TI}) dependent on the sensed time variable (t_H);
and which brings about a motor control interrupt (FIG. 10) after counting that first predefined count value.
7. The motor according to any of the foregoing claims, wherein

a rotor position-dependent interrupt (FIG. 8) has a higher priority than a motor control interrupt (FIG. 10).

8. The motor according to any of claims 4 through 7, wherein the timer (CNT_HL) is loadable, during a motor control interrupt (FIG. 10: S302), with a predefined count value (t_{AR}); and subsequent to that loading operation a count is performed until the next rotor position-dependent interrupt (FIG. 8), so as to ascertain, by taking the difference between the predefined count value (t_{AR}) and the counter status (t_E) upon reaching the next rotor position-dependent interrupt (FIG. 8), a time offset (FIG. 7A: t_1) between these interrupt operations.
9. The motor according to claim 8, wherein an autoreload register (AR), which stores the first predefined count value (t_{TI}) and feeds it to the timer (CNT_HL) during the motor control interrupt (FIG. 10) as the predefined count value, is provided for loading the predefined count value (t_{AR}).

10. A method for rotation speed-dependent commutation of an electronically commutated motor which has a stator and a rotor and also a program-controlled microprocessor or microcontroller, hereinafter called a microprocessor, serving to control its commutation, comprising the following steps:

- a) a time variable (t_H) that is substantially inversely proportional to the rotation speed of the rotor is ascertained;
- b) from that time variable (t_H), a numerical value (t_{TI}) is calculated according to a predefined calculation rule;
- c) beginning at a predefined first rotor position, a first time corresponding to that calculated numerical value is measured;
- d) after that first time has elapsed, a commutation (TN) is triggered;
- e) subsequent thereto, a second time (t_1) until reaching a predefined second rotor position is measured;
- f) the first and second times are added, and their sum, optionally corrected by means of at least one correction factor, is used as a time variable (t_H) that is substantially inversely proportional to the rotation speed of the motor.

11. The method according to claim 10, wherein the predefined calculation rule comprises a subtraction step in which a predefined time (t_{ZW}) is subtracted from the time variable (t_H) that is substantially inversely proportional to the rotation speed of the rotor.

12. The method according to claim 10 or 11, wherein when the first time corresponding to the calculated numerical value (t_{TI}) is greater than the time offset between the predefined first rotor position and the predefined second rotor position, the time offset between those two rotor positions is sensed directly and is used (S256) as a time variable (t_H) that is substantially inversely proportional to the rotation speed of the motor.

13. The method according to any of claims 10 through 12, wherein the time variable (t_H) that is substantially inversely proportional to the rotation speed of the motor is compared to a predefined value (t_{SZW}) corresponding to a minimum rotation speed (FIG. 9: S264);
 a logical value (SZW) corresponding to the comparison result is buffered (FIG. 9: S266); and
 if that logical value (SZW) has a predefined value, the triggering of a commutation that is accomplished after the first time (t_{TI}) has elapsed is suppressed (FIG. 10: S304, S306).
14. The method according to any of claims 10 through 13, wherein when a predefined rotor position is reached, a rotor position-dependent interrupt is executed with an interrupt routine (FIG. 8A, 8B) at the beginning of which a timer (CNT_HL) providing time measurement is halted (S202), and its instantaneous value is stored in a variable (t_E).
15. The method according to claim 14, wherein
 in the rotor position-dependent interrupt routine, the timer (CNT_HL) providing time measurement is loaded, after it is halted (S202), with a numerical value (t_{TI}) previously calculated in accordance with the predefined calculation rule, and is then started (FIG. 8B: S238).
16. The method according to claim 14 and 15, wherein the time span between the halting of the timer (CNT_HL) providing time measurement and the starting thereof is used as a correction factor (t_{CORR}) when the time variable (t_H) that is substantially inversely proportional to the rotation speed of the motor is ascertained.
17. The method according to any of claims 10 through 16, wherein
 the first time corresponding to the calculated numerical value (t_{TI}), which is measured from a predefined first rotor position, is calculated from a time variable that is substantially inversely proportional to the rotation speed of the rotor and that was ascertained approximately one rotor revolution prior to the instant at which the present measurement of the first time is being made (FIG. 18: 542, 544, 546).
18. The method according to any of claims 10 through 17, wherein
 at least one non-time-critical process step is configured as a subroutine (FIG. 9) which is invoked in the program sequence when processor time is available (FIG. 15).
19. The method according to claim 18, wherein calculation of the time variable (t_H) that is substantially inversely proportional to the rotation speed of the motor, and calculation of the numerical value (t_{TI}) on which measurement of the first time is based, are accomplished in such a subroutine

(FIG. 9).

20. The method according to any of claims 10 through 19, wherein at least one parameter (t_{ZW}) necessary for calculations is loaded, from a nonvolatile memory (26) associated with the motor, into a RAM (25) of the microprocessor (11).

21. The method according to claim 20, wherein the nonvolatile memory (26) has associated with it a bus (30) by way of which at least one parameter in the nonvolatile memory (26) is modifiable.

22. An electronically commutated motor comprising a stator, a rotor (39), and a program-controlled microprocessor or microcontroller (11), hereinafter called a microprocessor, serving to control commutation of the motor (M),

a timer (CNT_HL) being started with a predefined start value (t_{TI}) at at least one predefined rotor position, said timer (CNT_HL), after a time dependent on the start value (t_{TI}) has elapsed, triggering an interrupt (FIG. 10) in the program of the microprocessor (11) during which a commutation (FIG. 10: S318, S320, S322) of the motor (M) is accomplished.

23. The motor according to claim 22, wherein the start value (t_{TI}) of the timer (CNT_HL) is a function of a rotation speed-dependent time (t_H) which the rotor (39) has required, in a time region preceding that commutation, to rotate through a predefined rotation angle.

FIG. 9

24. The motor according to claim 23, wherein, in order to calculate the start value (t_{TI}), a predefined time (t_{ZW}) is subtracted from the rotation speed-dependent time (t_H).

25. A method for determining a rotation speed-dependent variable in an electronically commutated motor (M) which includes a stator, a permanent-magnet rotor (39), a galvanomagnetic sensor (40) controlled by that rotor, a microprocessor or microcontroller (11) hereinafter called a microprocessor, a control program associated with that microprocessor, and a timer (CNT_HL), comprising the following steps:

a) the output signal of the galvanomagnetic sensor (40) is converted into a square-wave signal (HALL);

b) predefined signal changes of the square-wave signal (HALL) are sensed by the microprocessor and each converted by the control program into a rotor position-dependent interrupt (FIG. 4: Y);

c) at a rotor position-dependent interrupt (Y), a first counter status (FIG. 4: t_0) of the timer is recorded;

d) at a rotor position-dependent interrupt (Y) subsequent thereto, a second counter status (t_E) of the timer is recorded;

e) a value (FIG. 4: HL) which corresponds to the time required by the rotor (39) to travel through a predefined rotation angle (FIG. 4, FIG. 20) is ascertained, as a rotation speed-dependent variable, from the difference between the two counter statuses (t_0 , t_E).

26. An electronically commutated motor (M) comprising
a stator (38) and a rotor (39),

a program-controlled microprocessor or microcontroller (11), hereinafter called a microprocessor, for controlling the commutation of the motor (M); and
a rotor position sensor (40, 41) whose output signal is conveyed, for the purpose of analysis by the microprocessor (11), to an interrupt-capable input of that microprocessor and is processed therein;

in order to furnish, at at least one output of the microprocessor, a control signal (OUT1, OUT2), for commutation of the motor, that is shifted by a shift time, with respect to the signal of the rotor position sensor (40,

41), the duration of the shift time being a predefined function of the rotation speed.

27. The electronically commutated motor (M) according to claim 26, wherein the microcontroller (11) comprises at least one interrupt-capable timer (CNT_HL) with which the at least one output of the microprocessor serving to deliver the control signal is influenced.

28. The electronically commutated motor (M) according to claim 27, wherein the timer (CNT_HL) is, in a specific state, automatically reloaded with a value (t_AR) and started again.

29. The electronically commutated motor (M) according to claim 26 or 27, wherein the microprocessor triggers an interrupt at each change in the signal (HALL) of the rotor position sensor (40, 41); and wherein the timer (CNT_HL) and the interrupts are used to measure the HALL length (HL).

090564 03001
T0320 6 90060

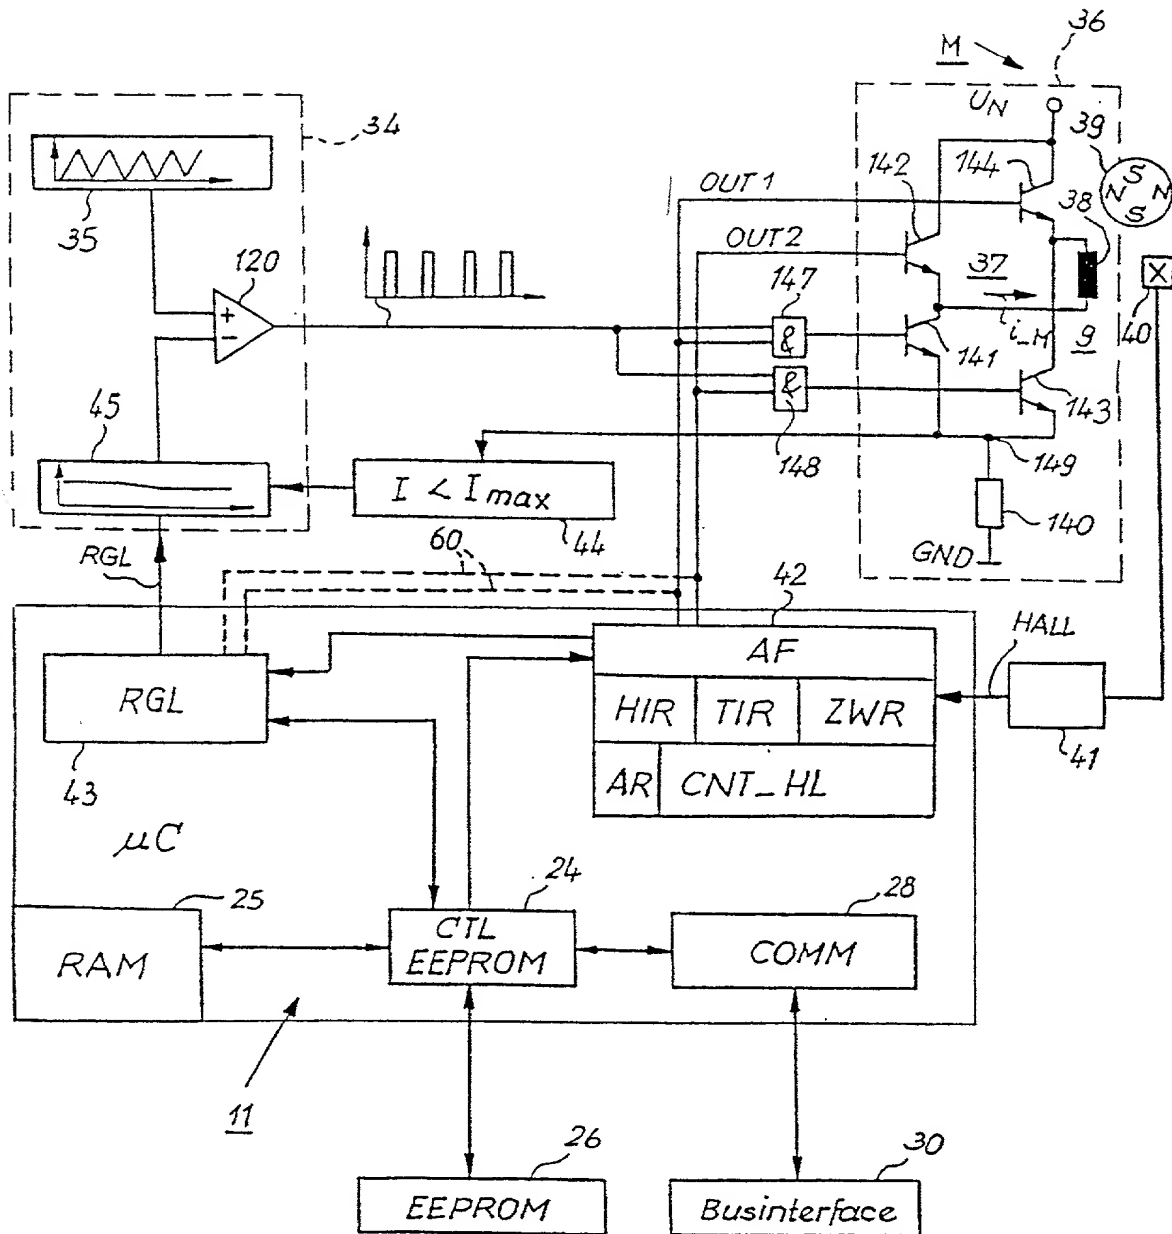


Fig. 1

2/24

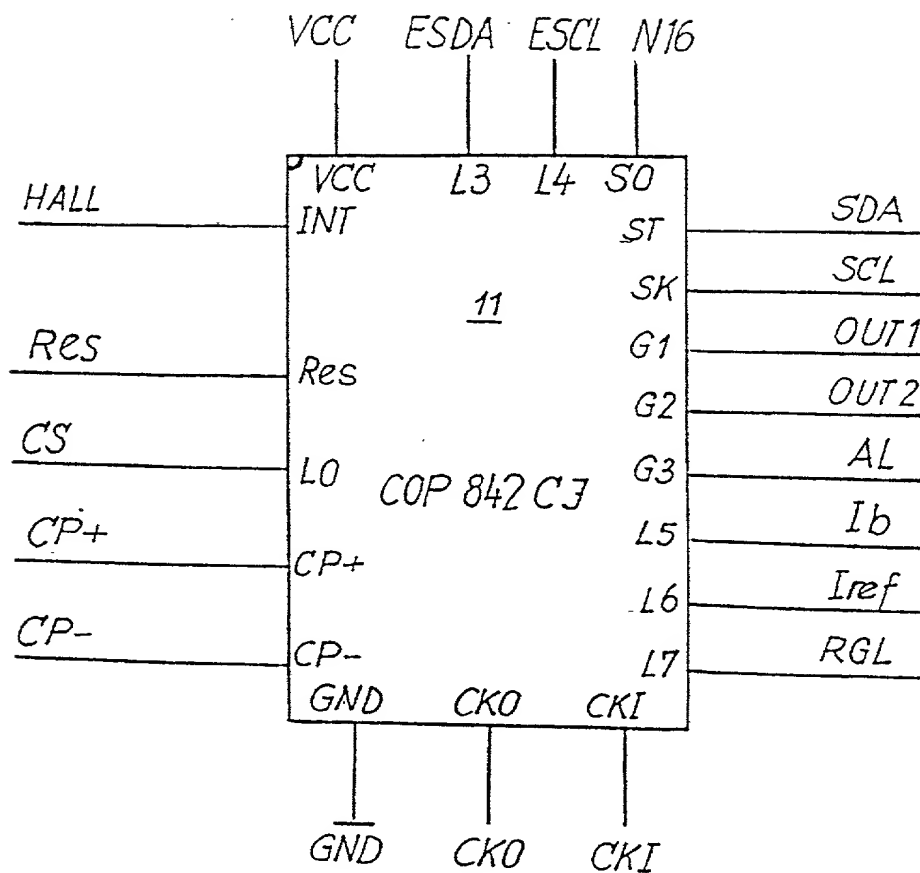


Fig. 2

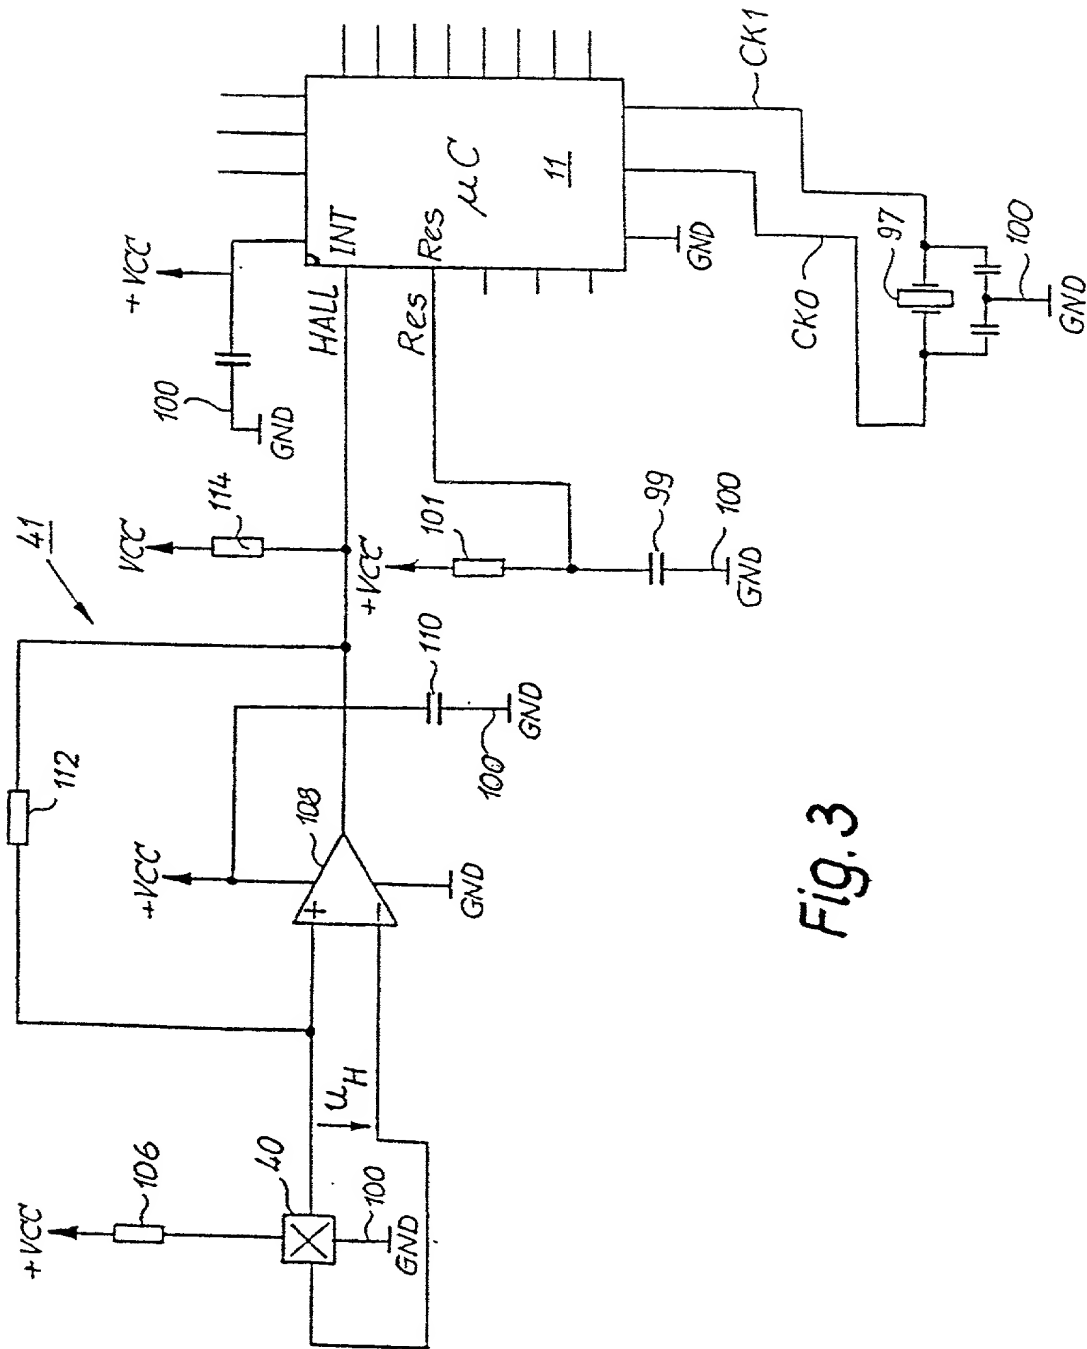


Fig. 3

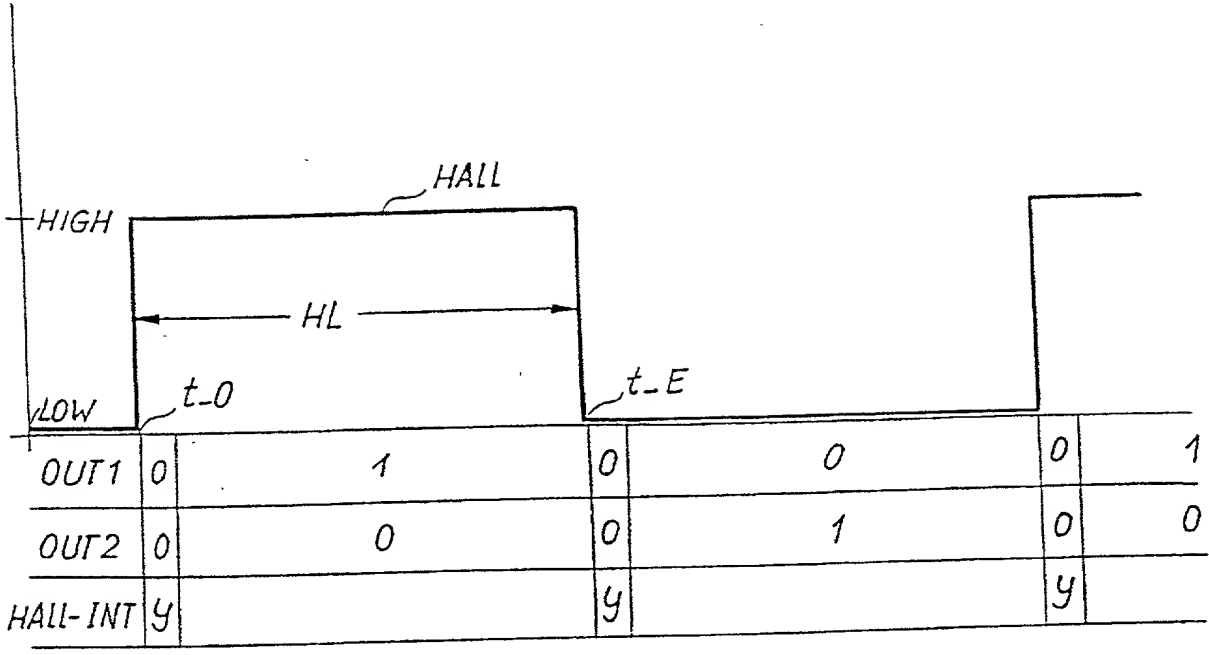


Fig. 4

5/24

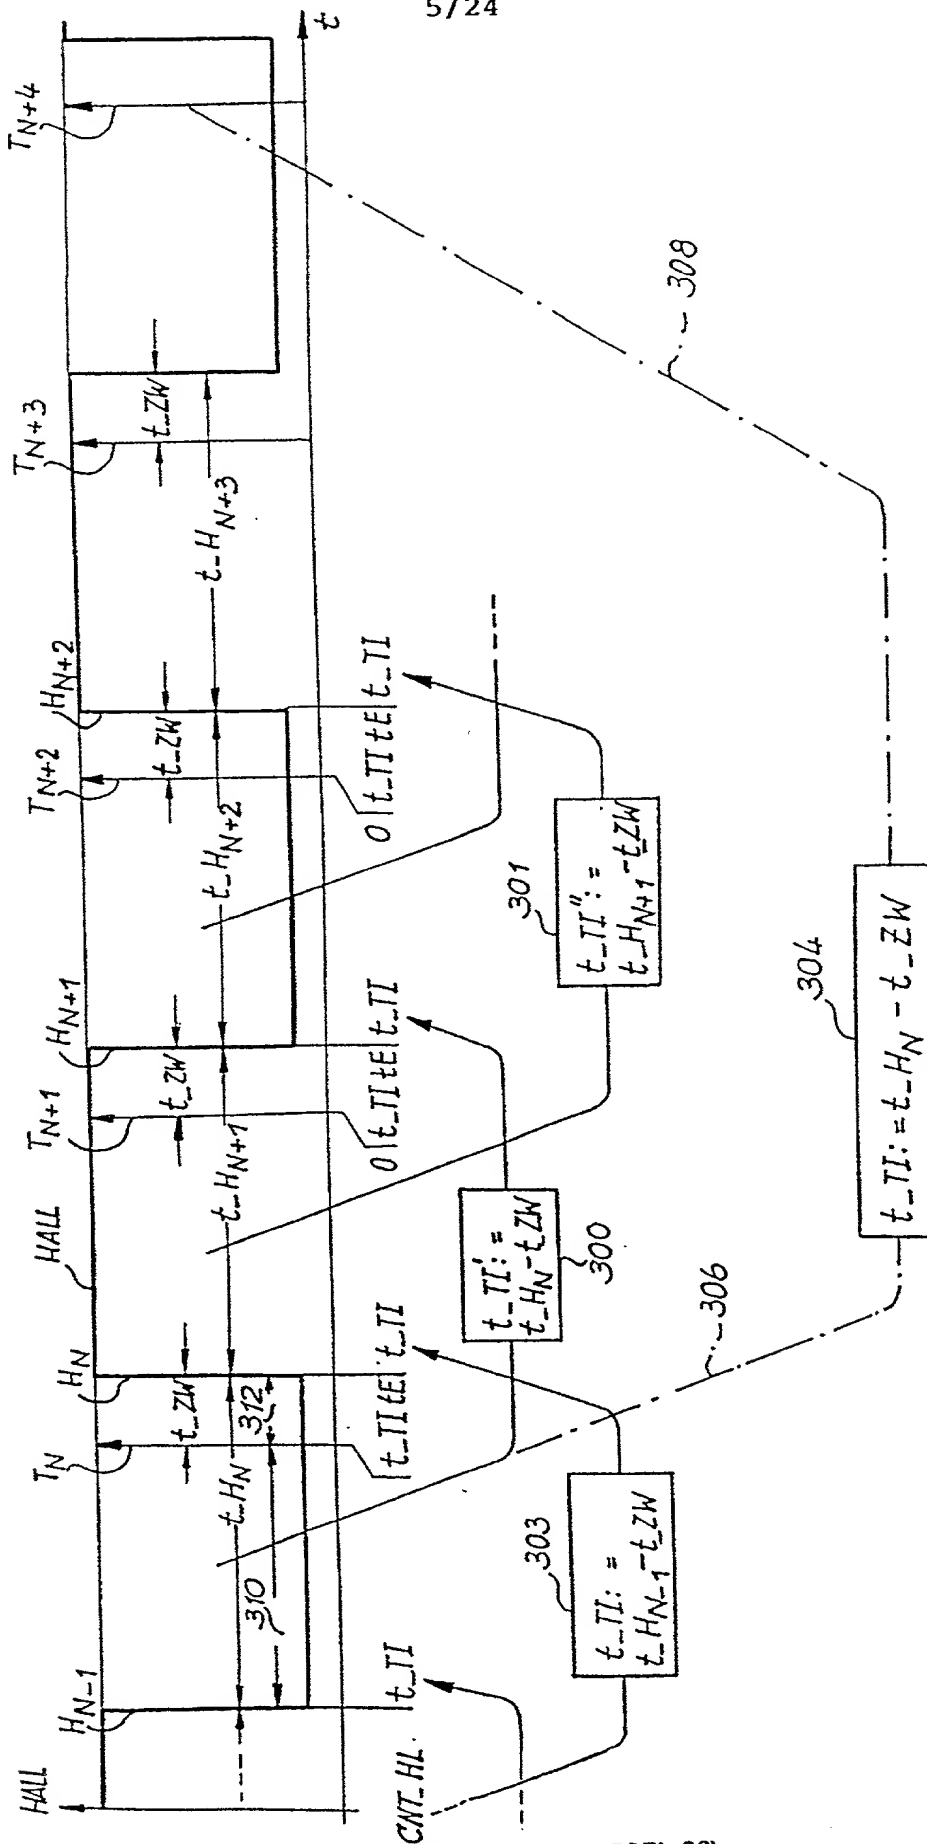


Fig. 5

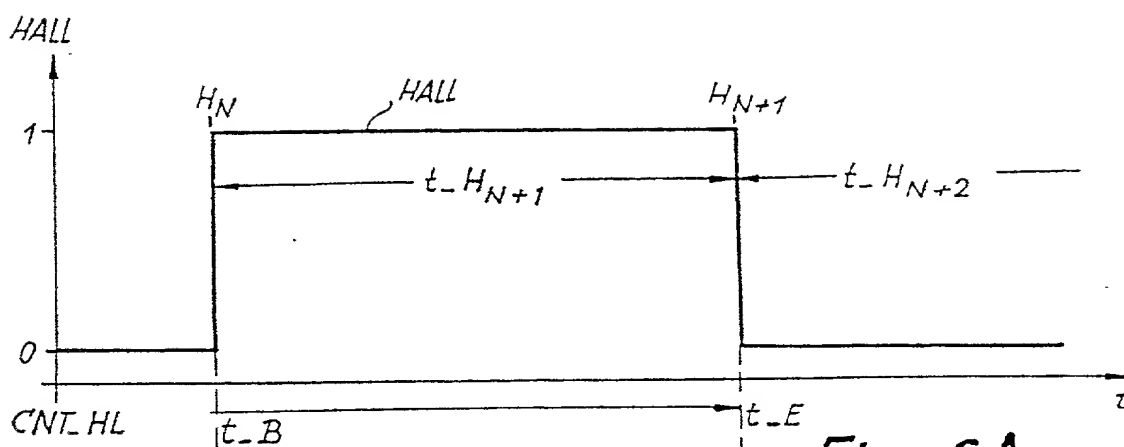


Fig. 6A

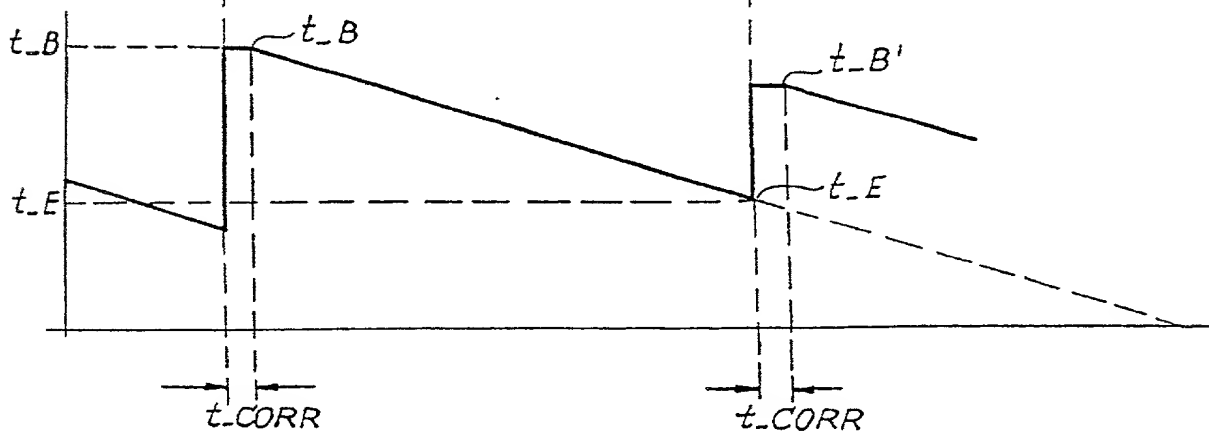


Fig. 6B

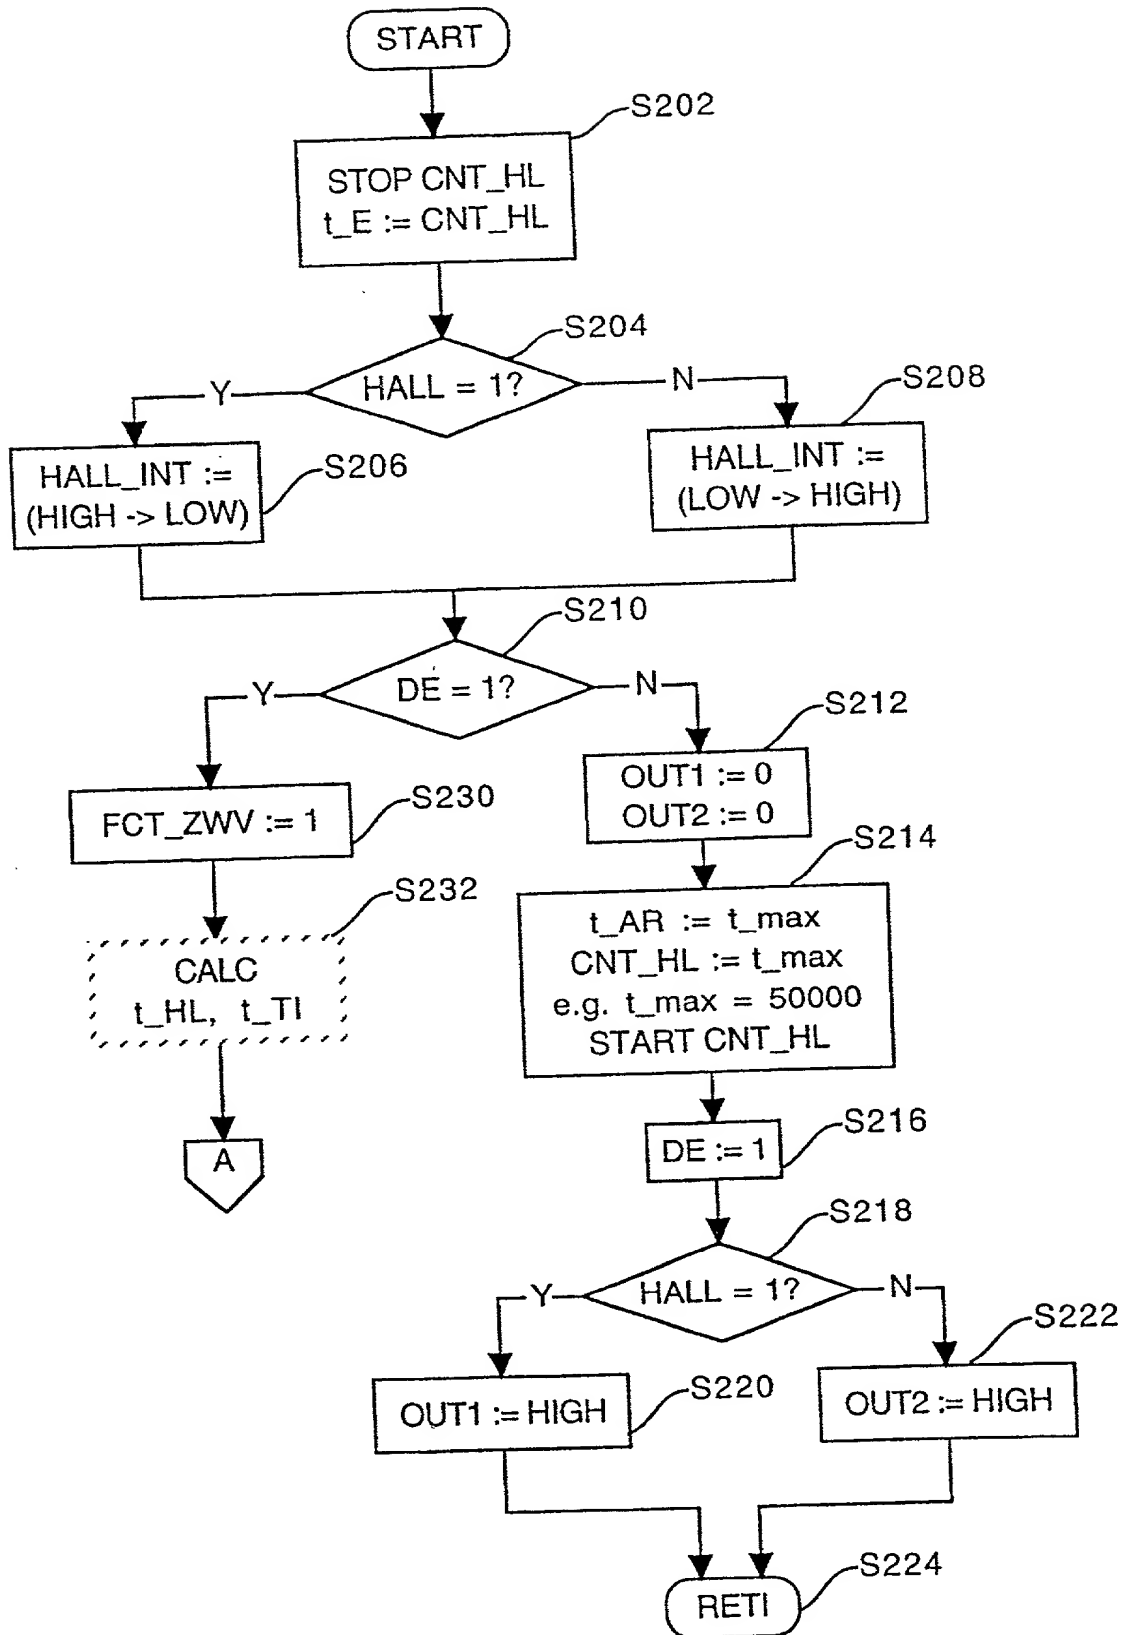


Fig. 8A

ERSATZBLATT (REGEL 26)

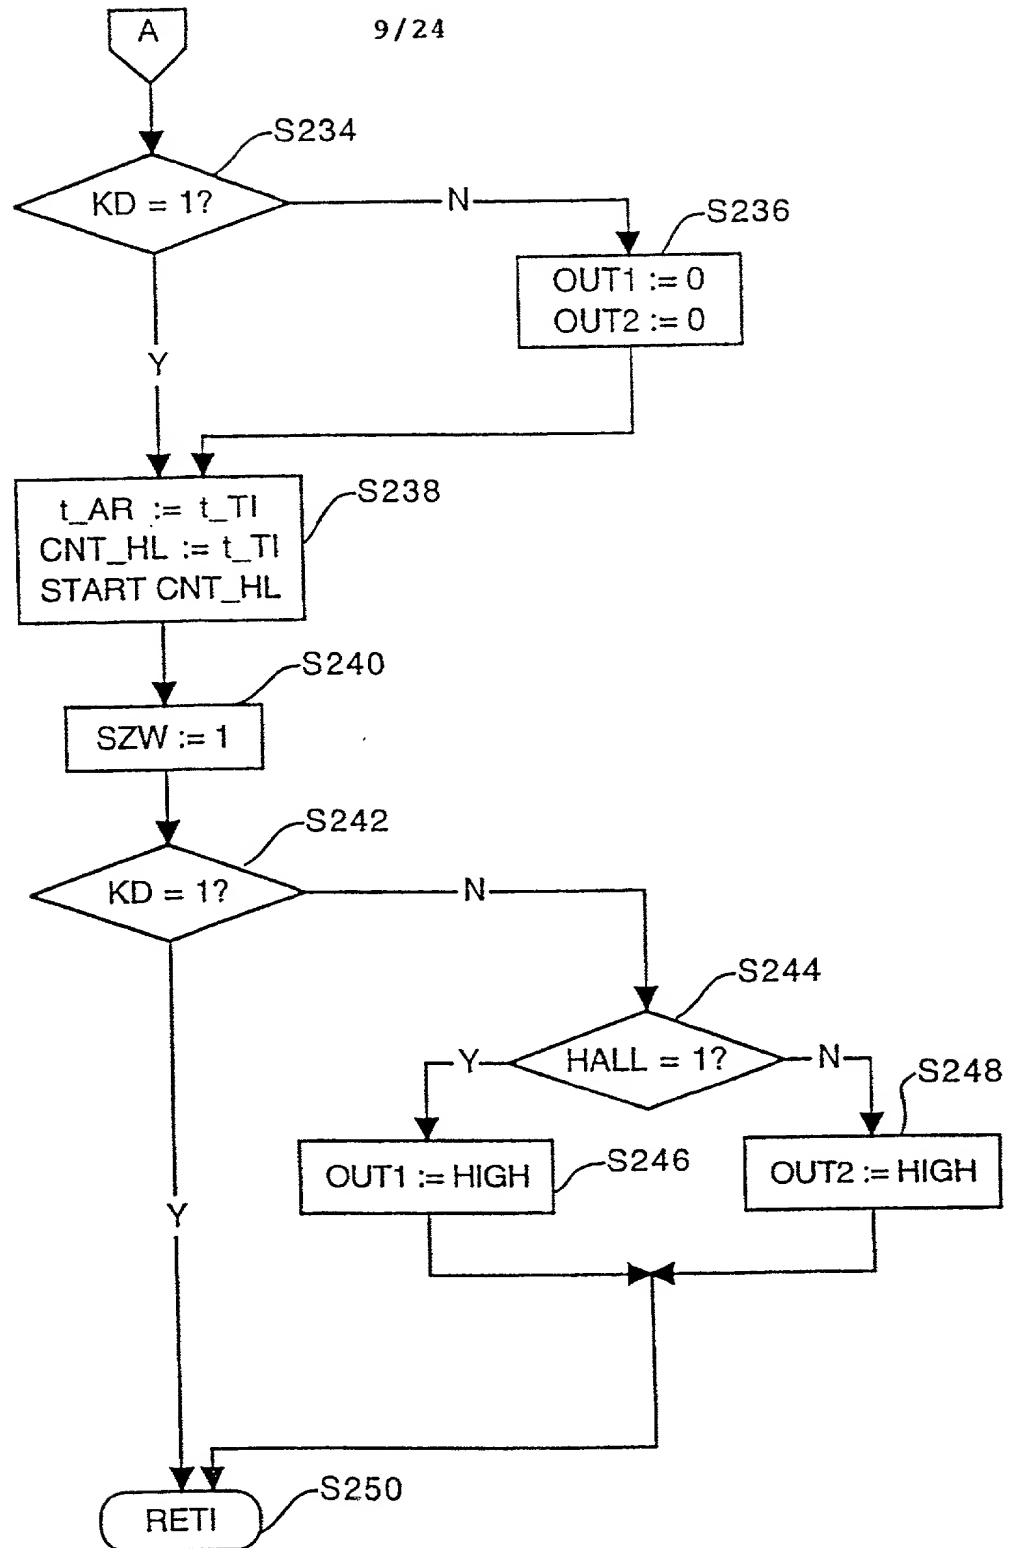


Fig. 8B

10/24

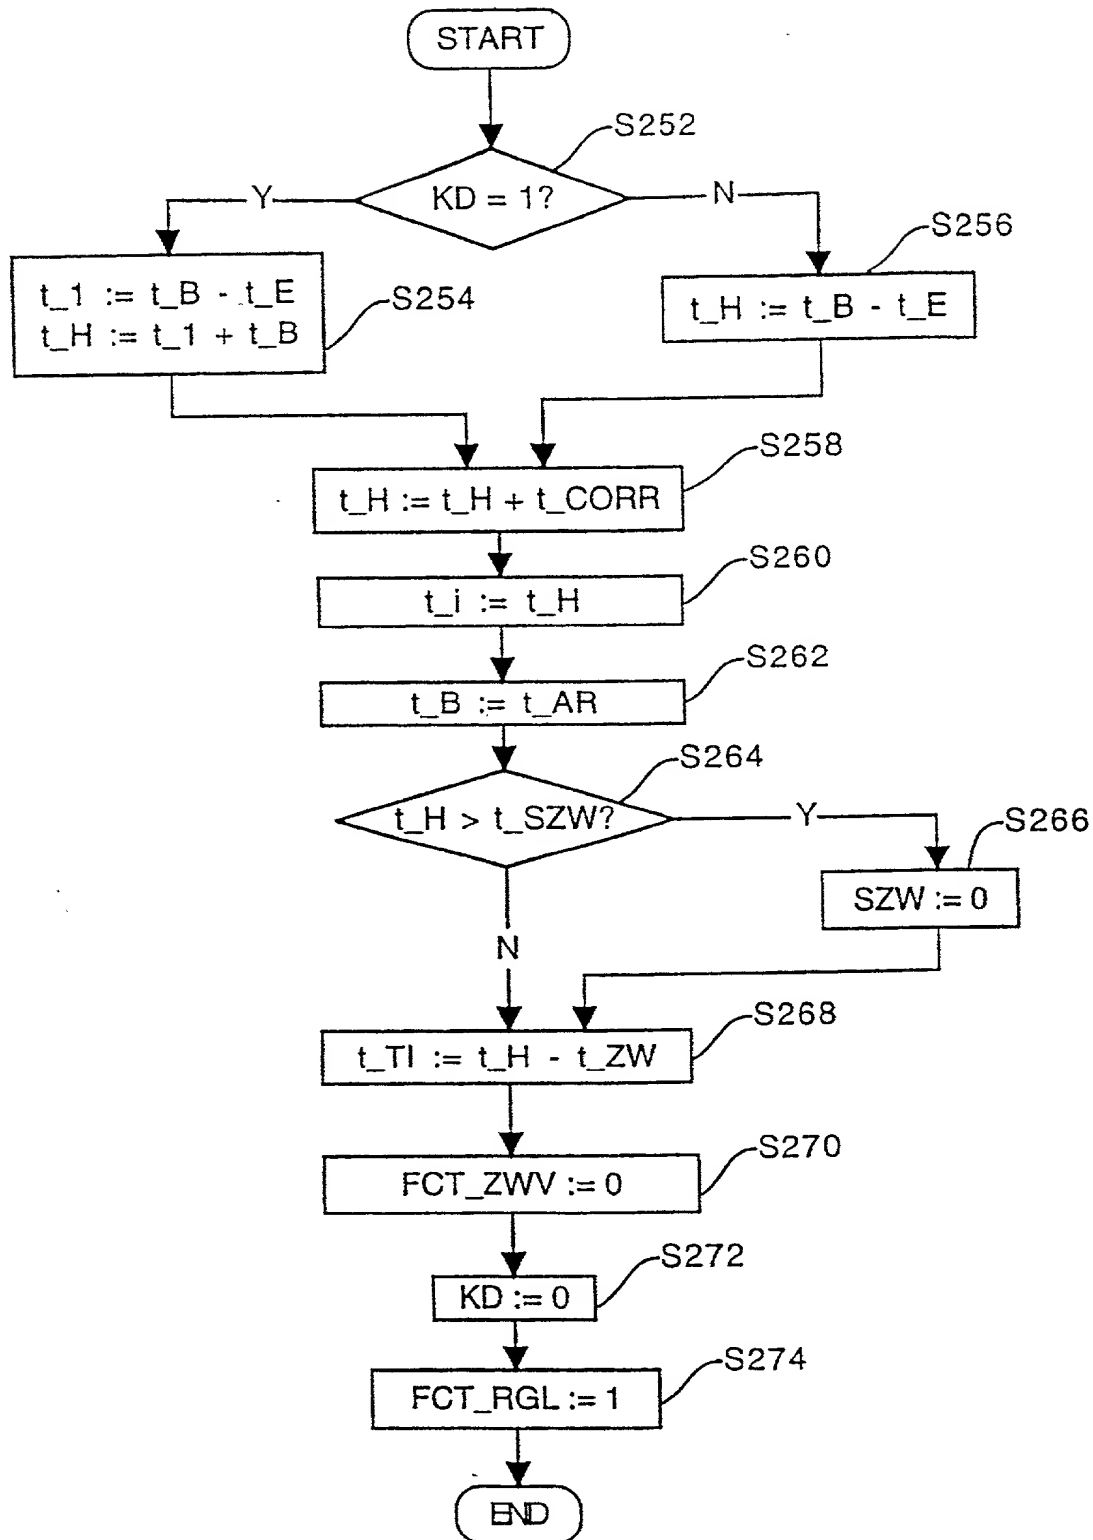


Fig. 9

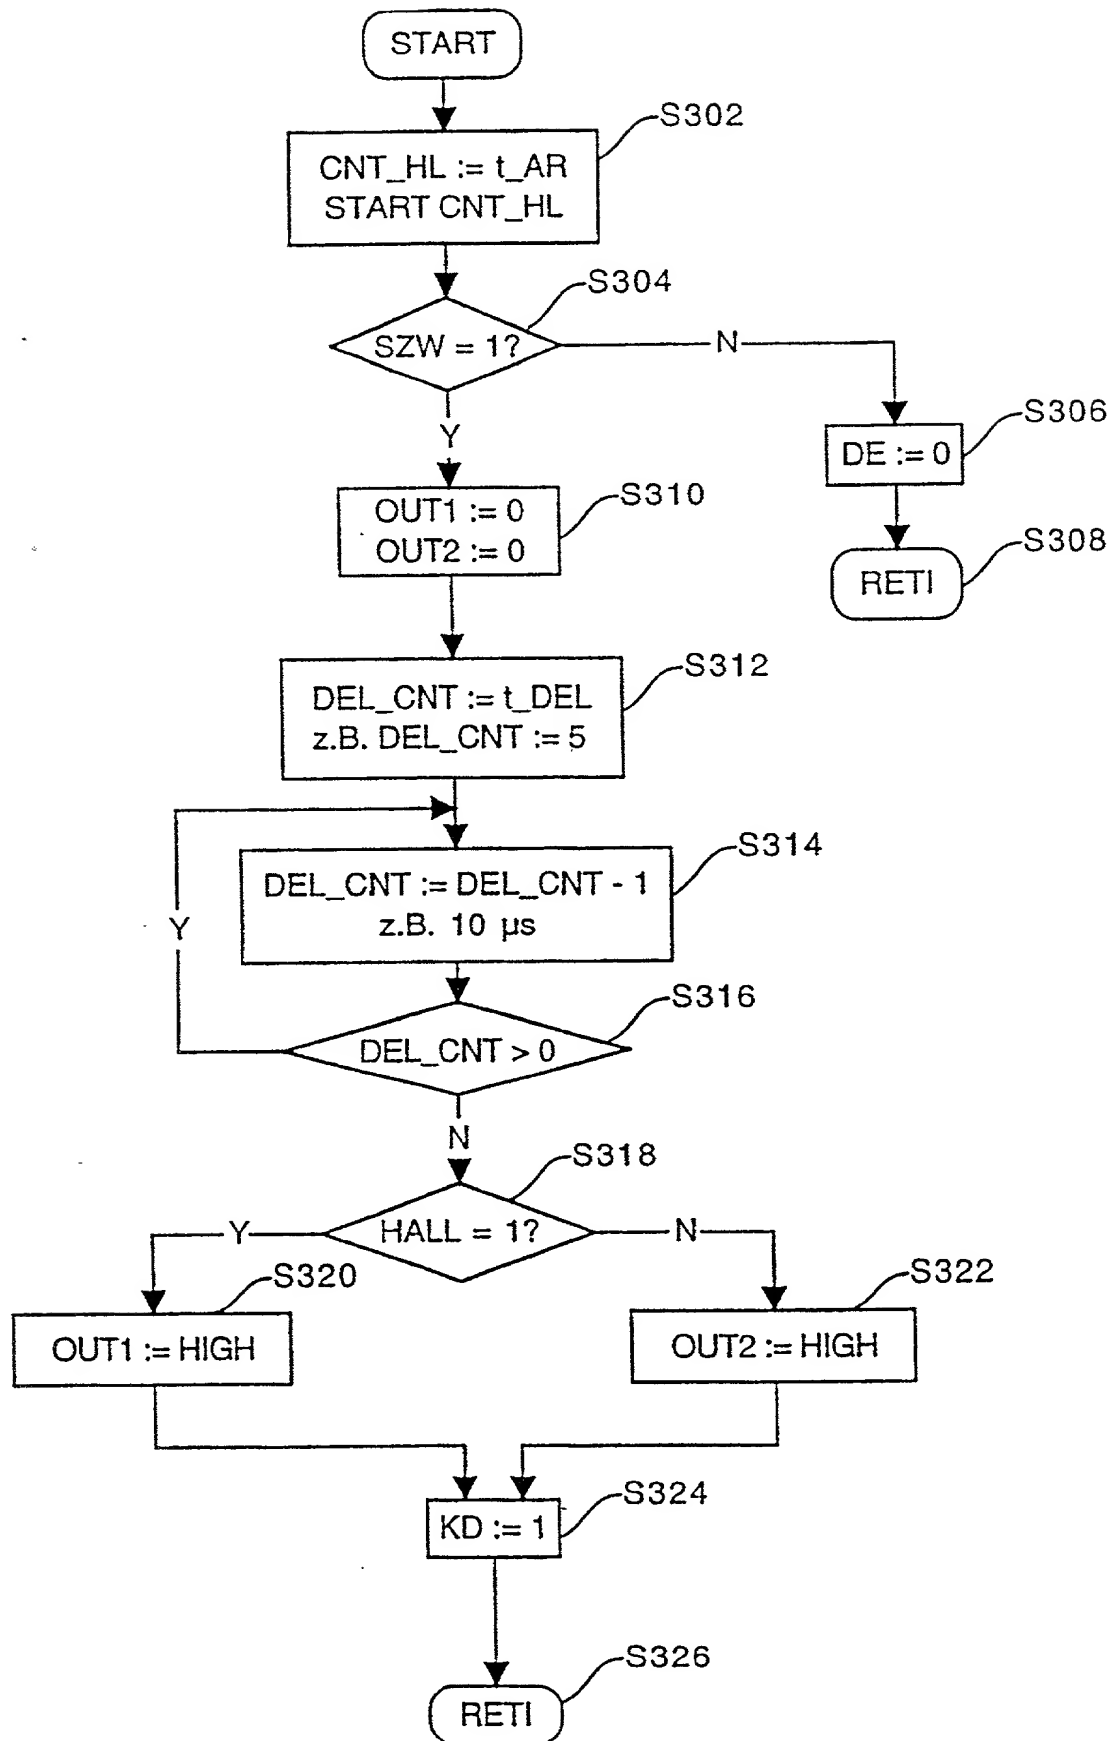


Fig. 10

12/24

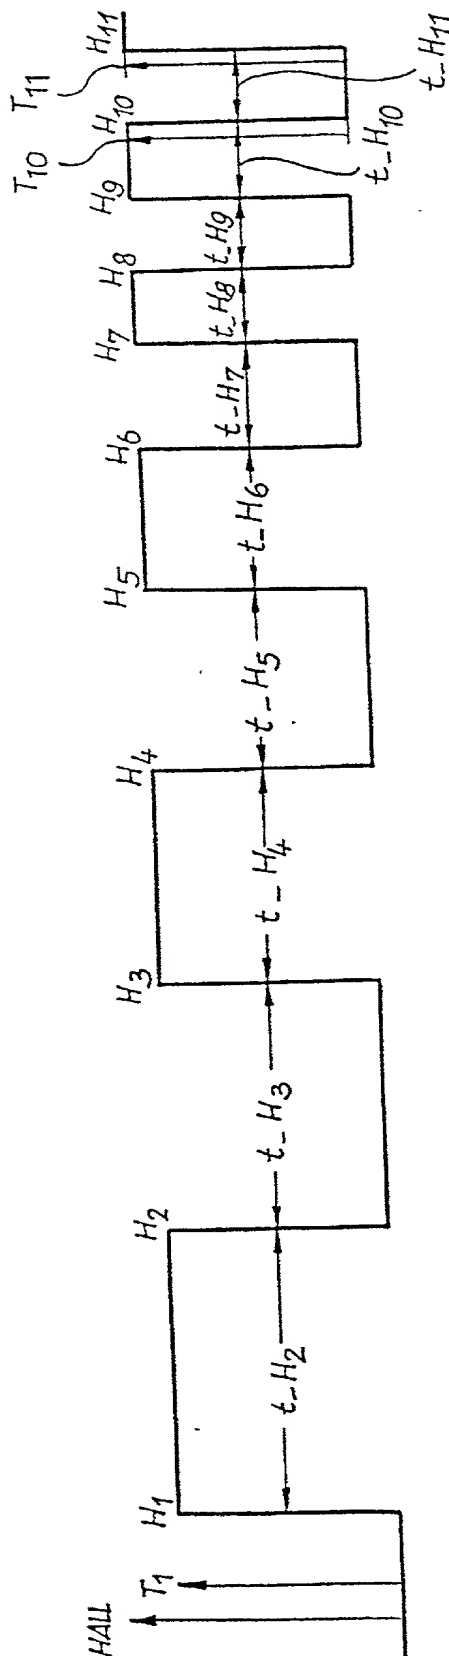


Fig. 11


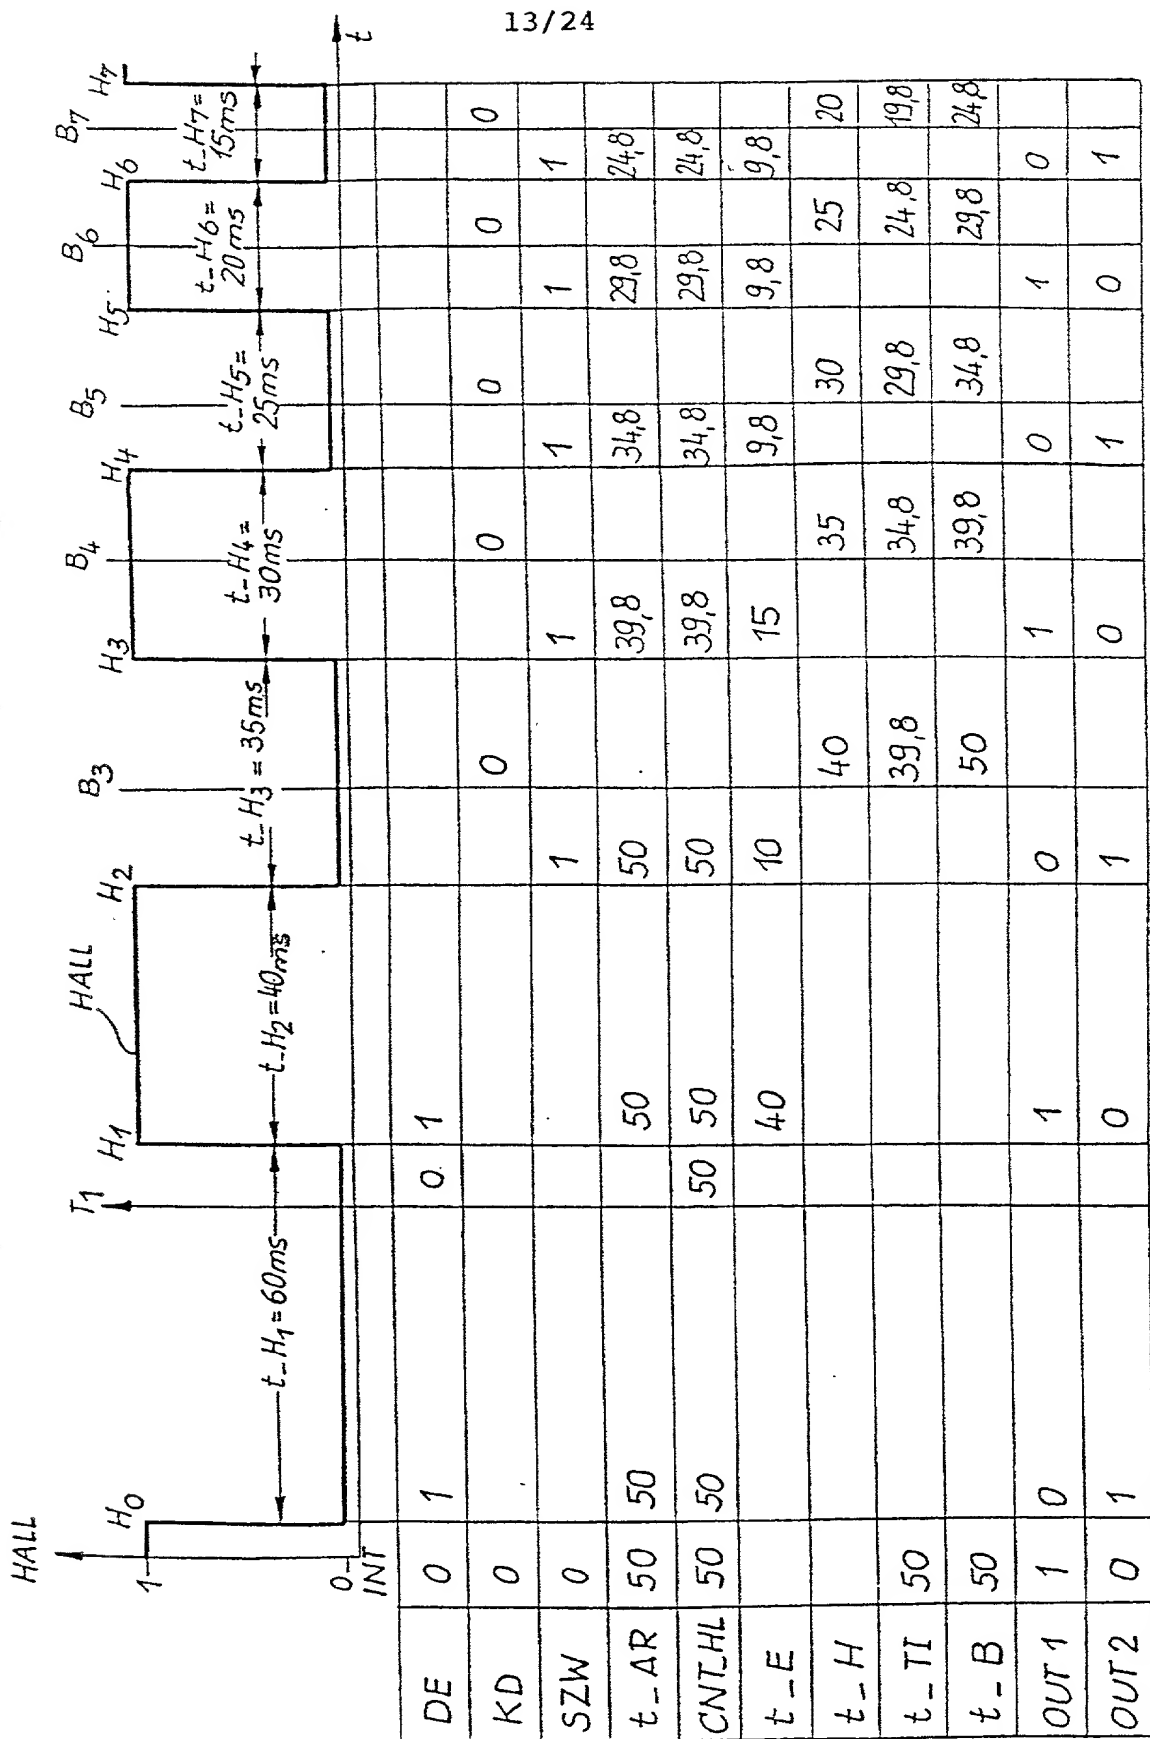


Fig. 12A

Fig. 12 B

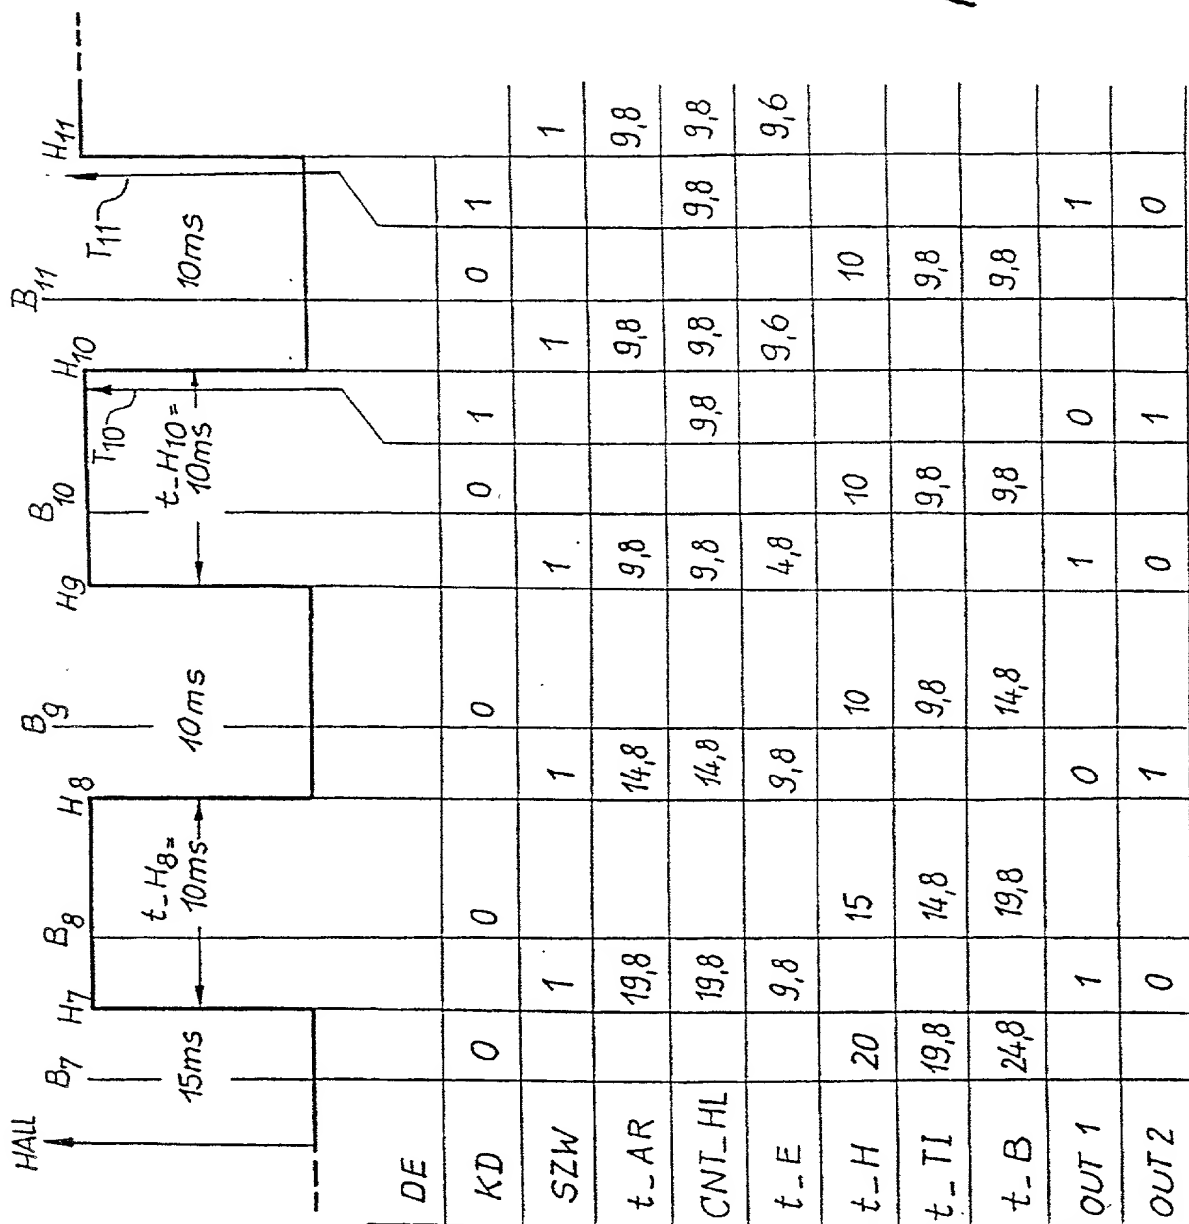

15/24


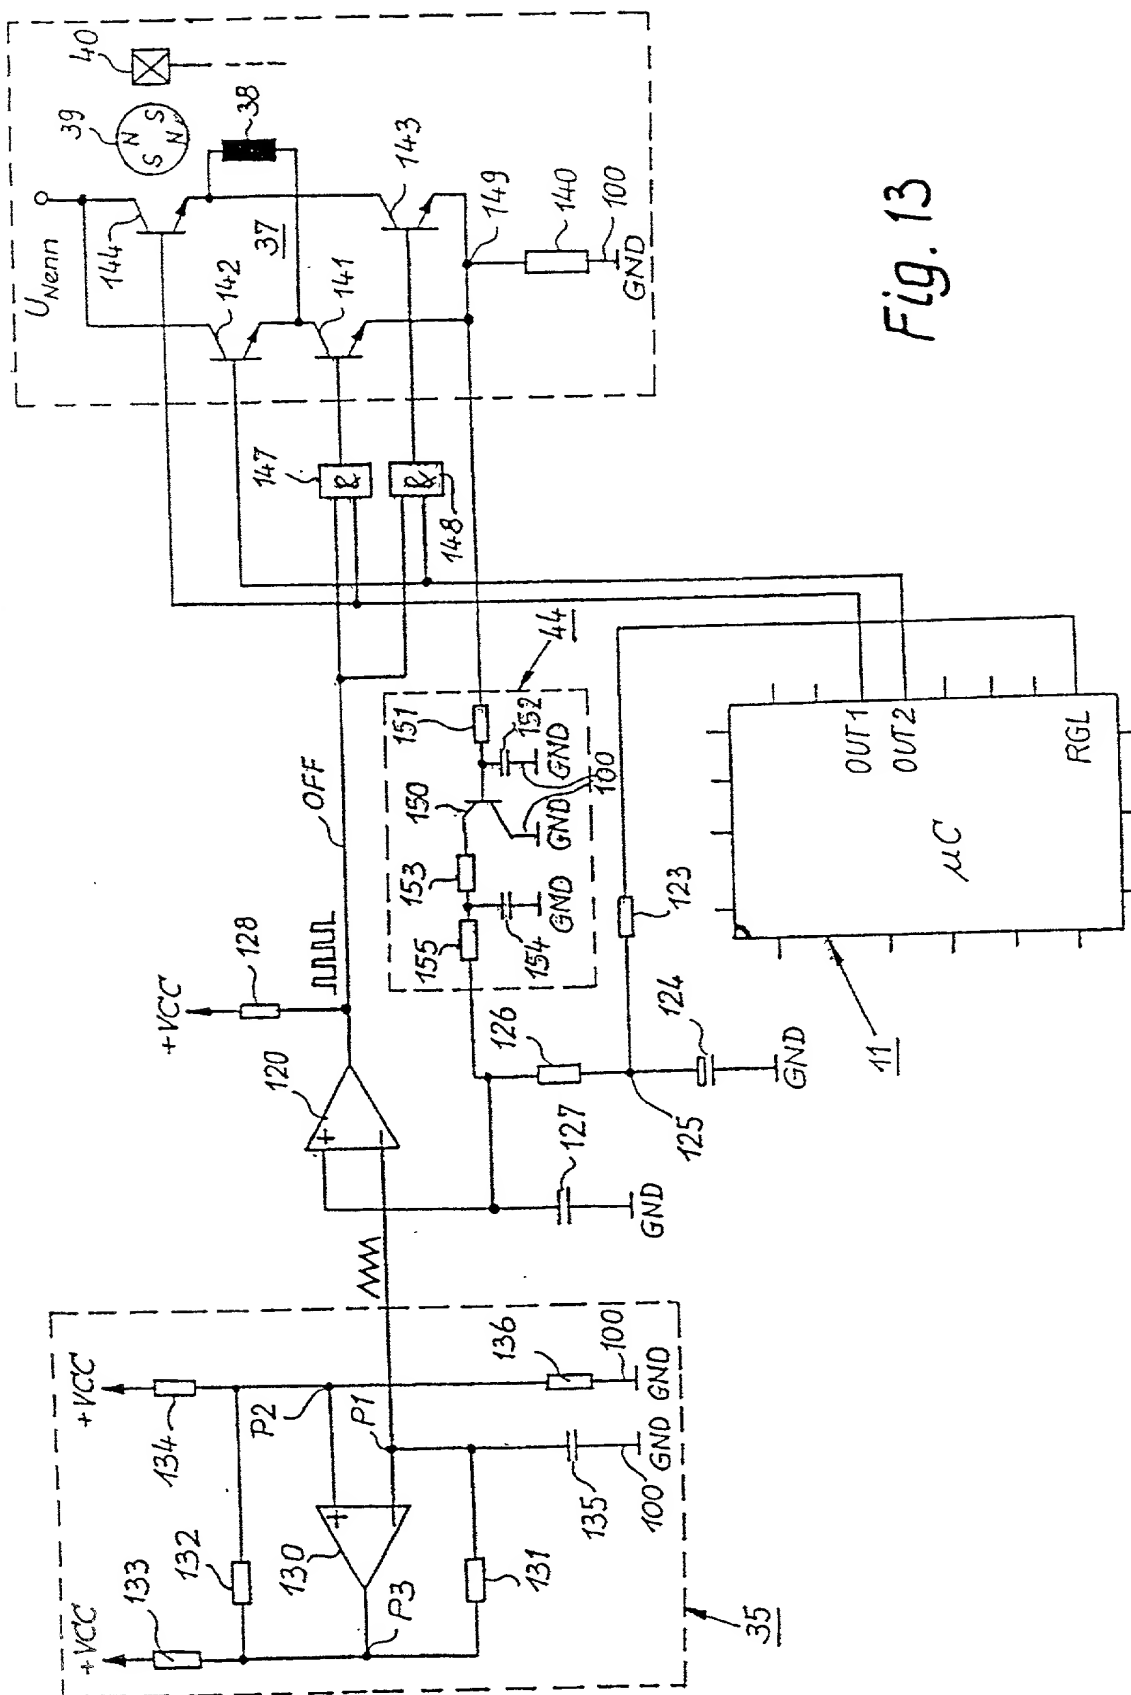


Fig. 13



17/24

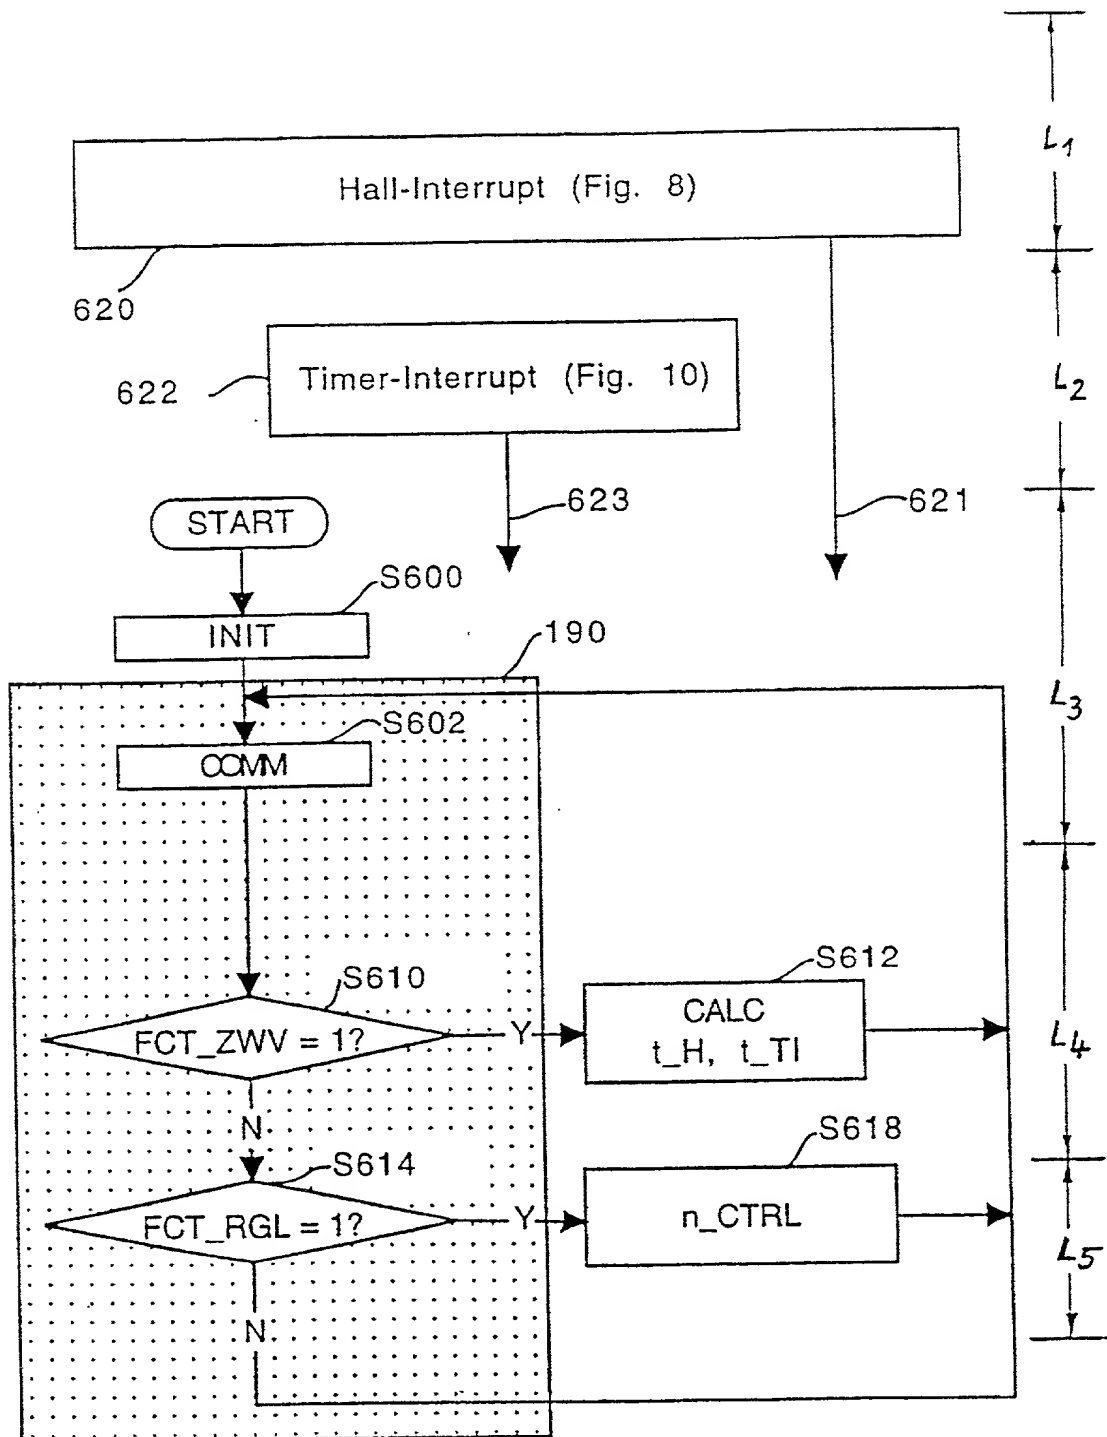


Fig. 15

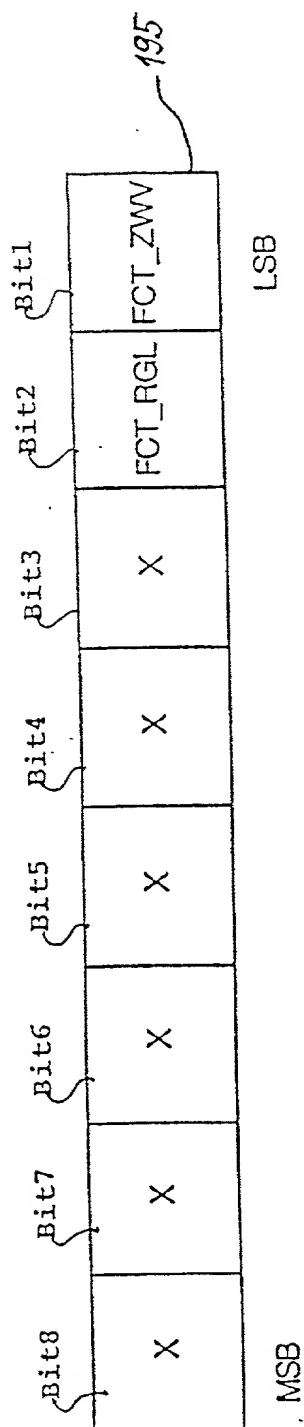


Fig. 16

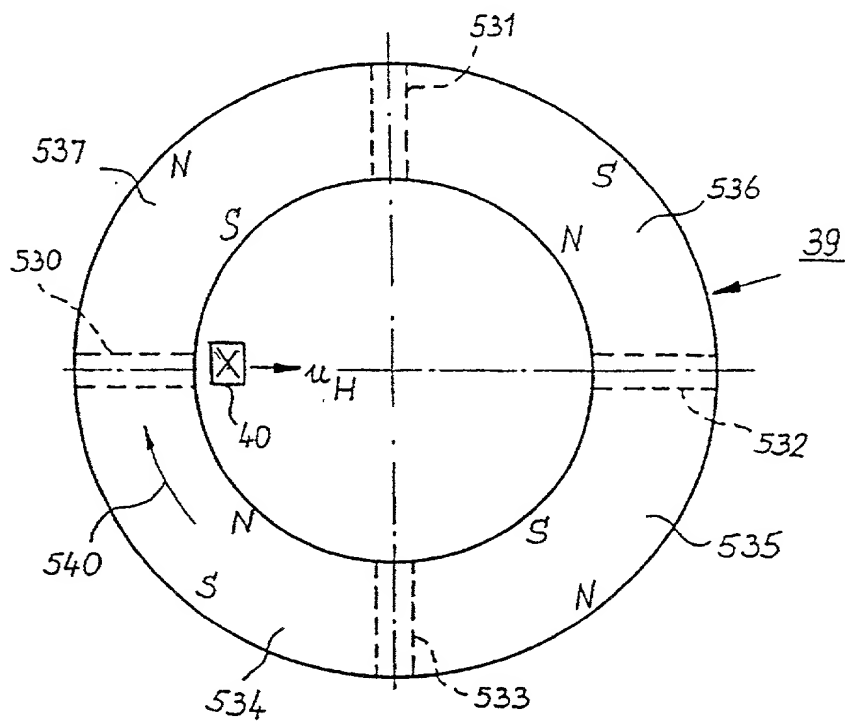


Fig. 17

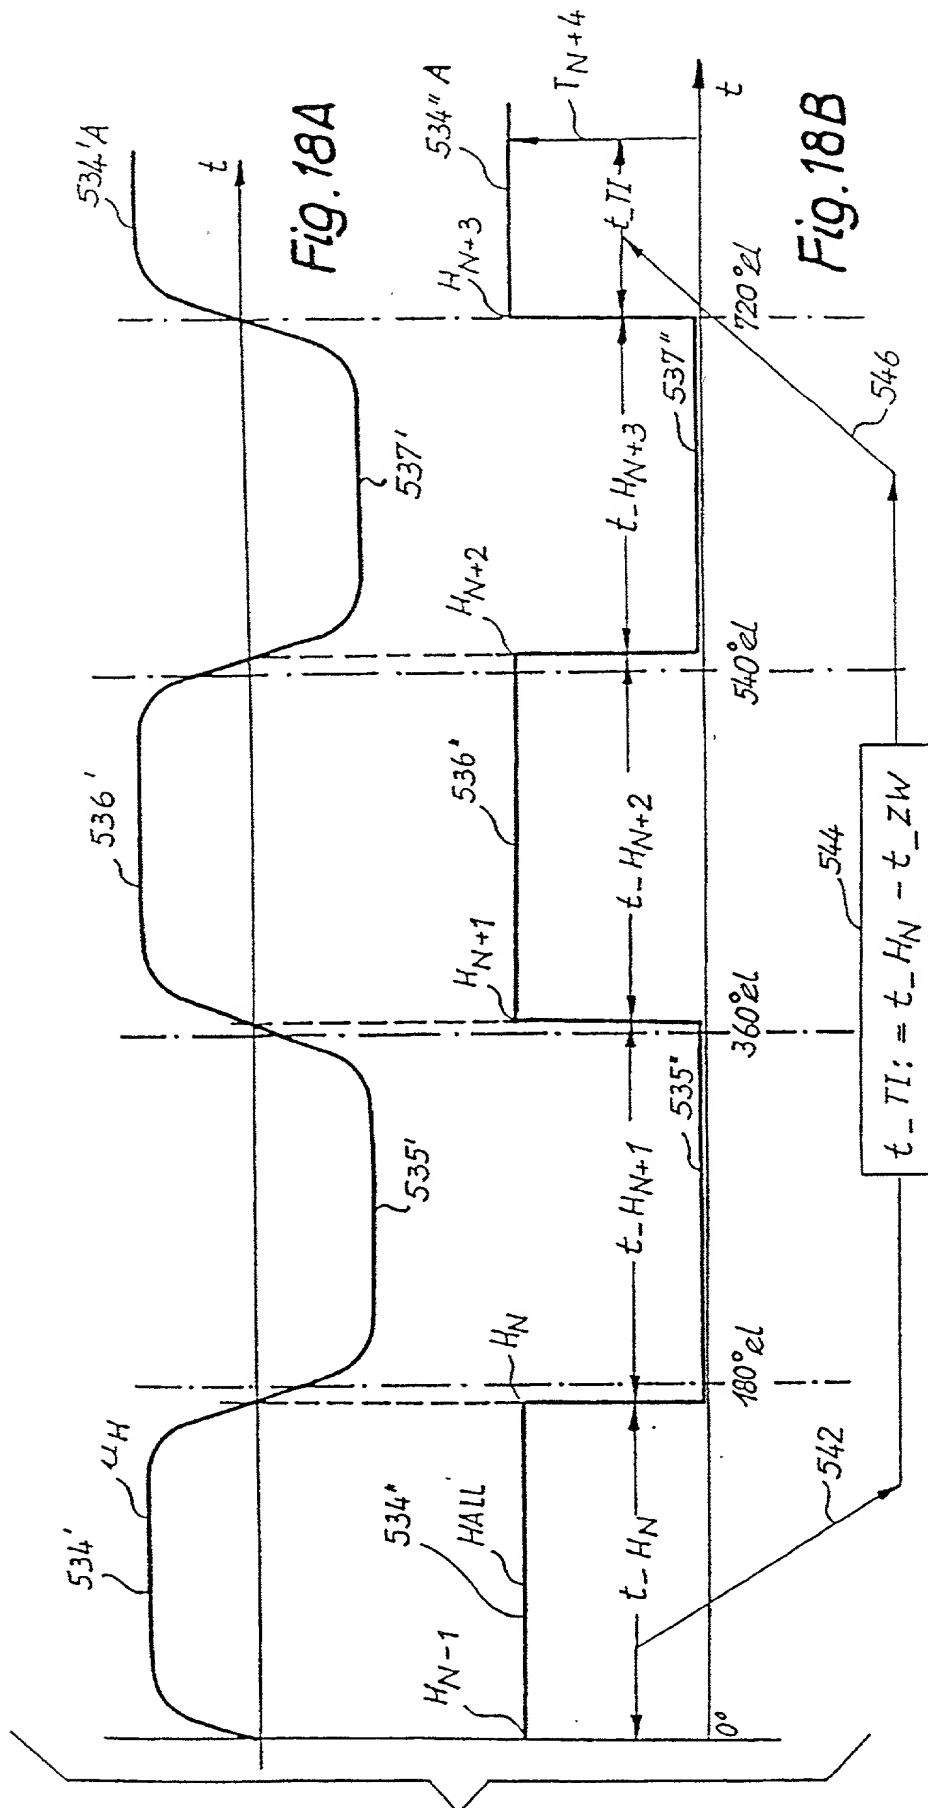


Fig. 18

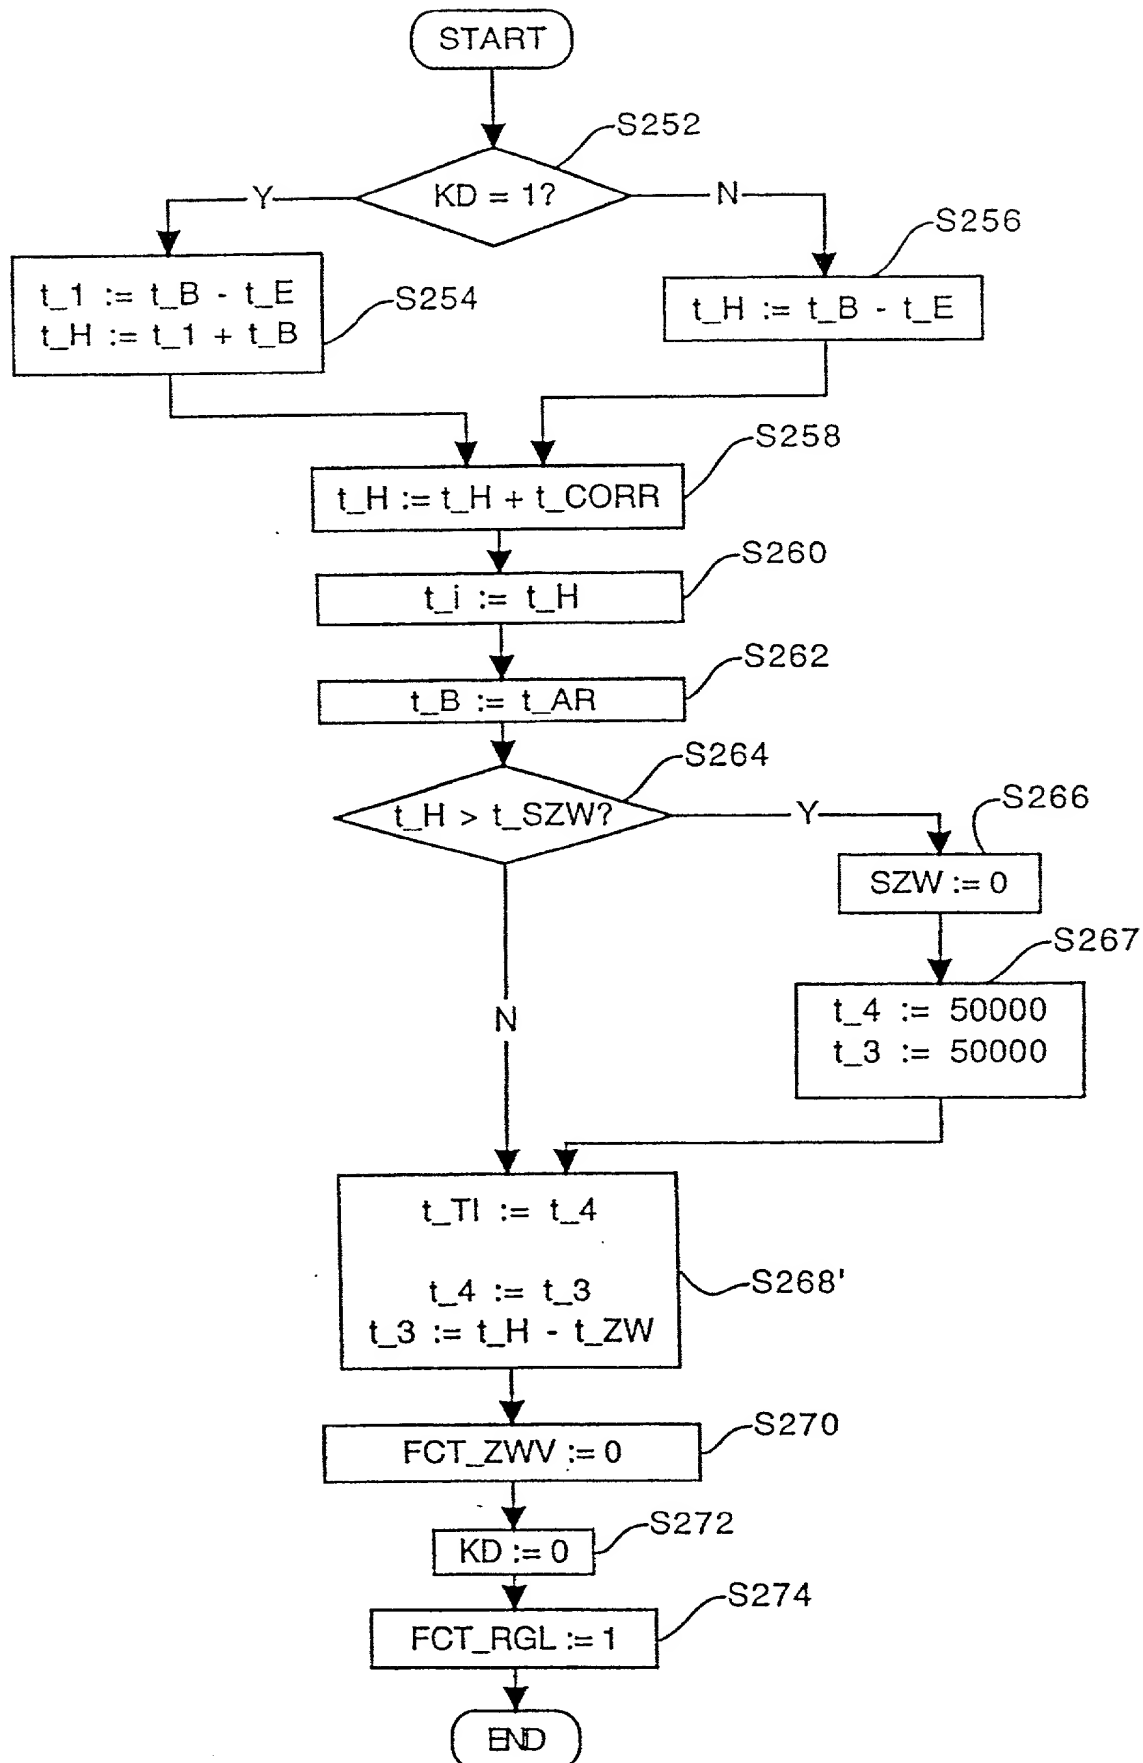


Fig. 19

ERSATZBLATT (REGEL 26)

22/24


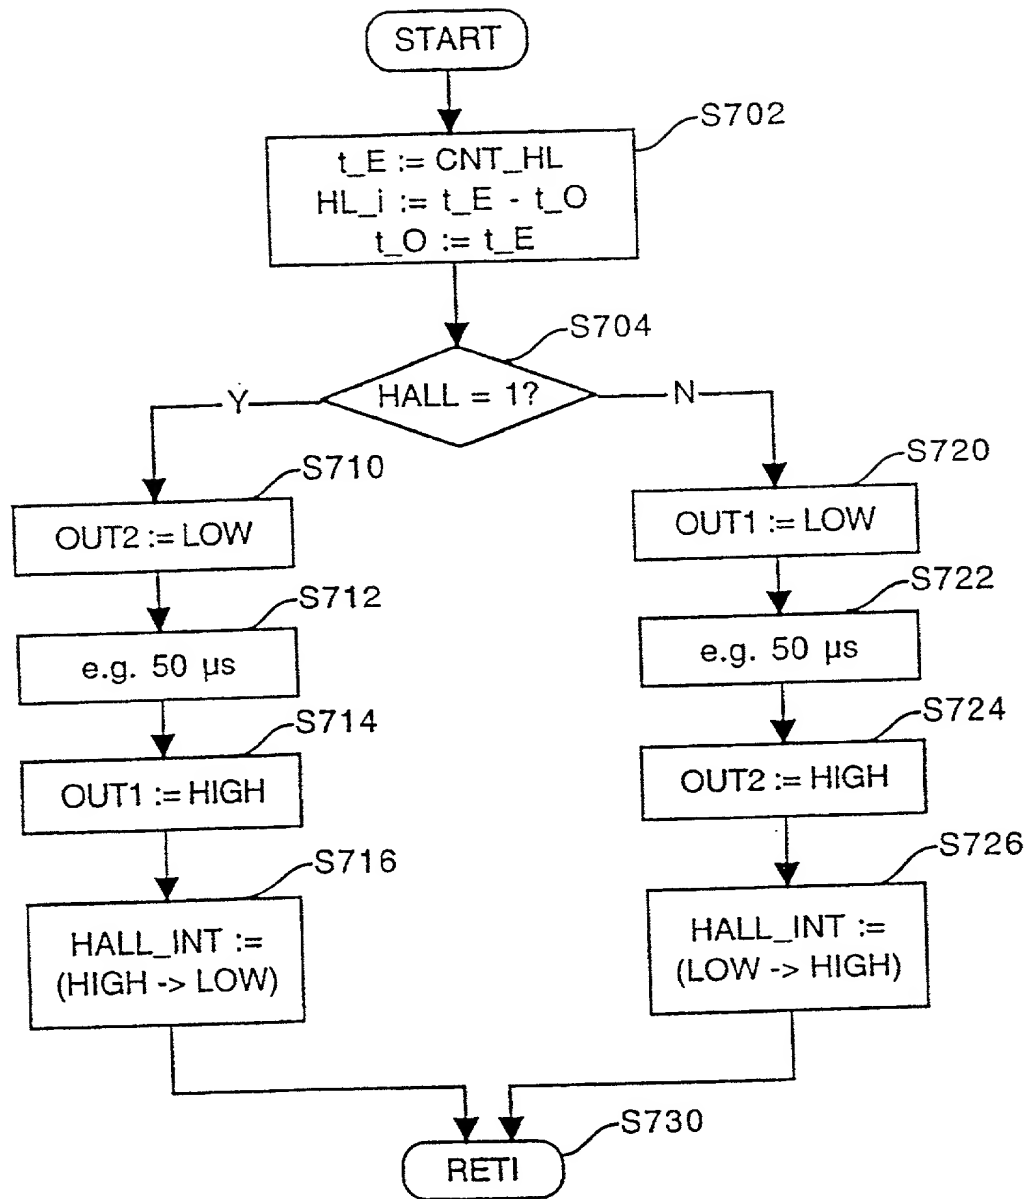


Fig. 20

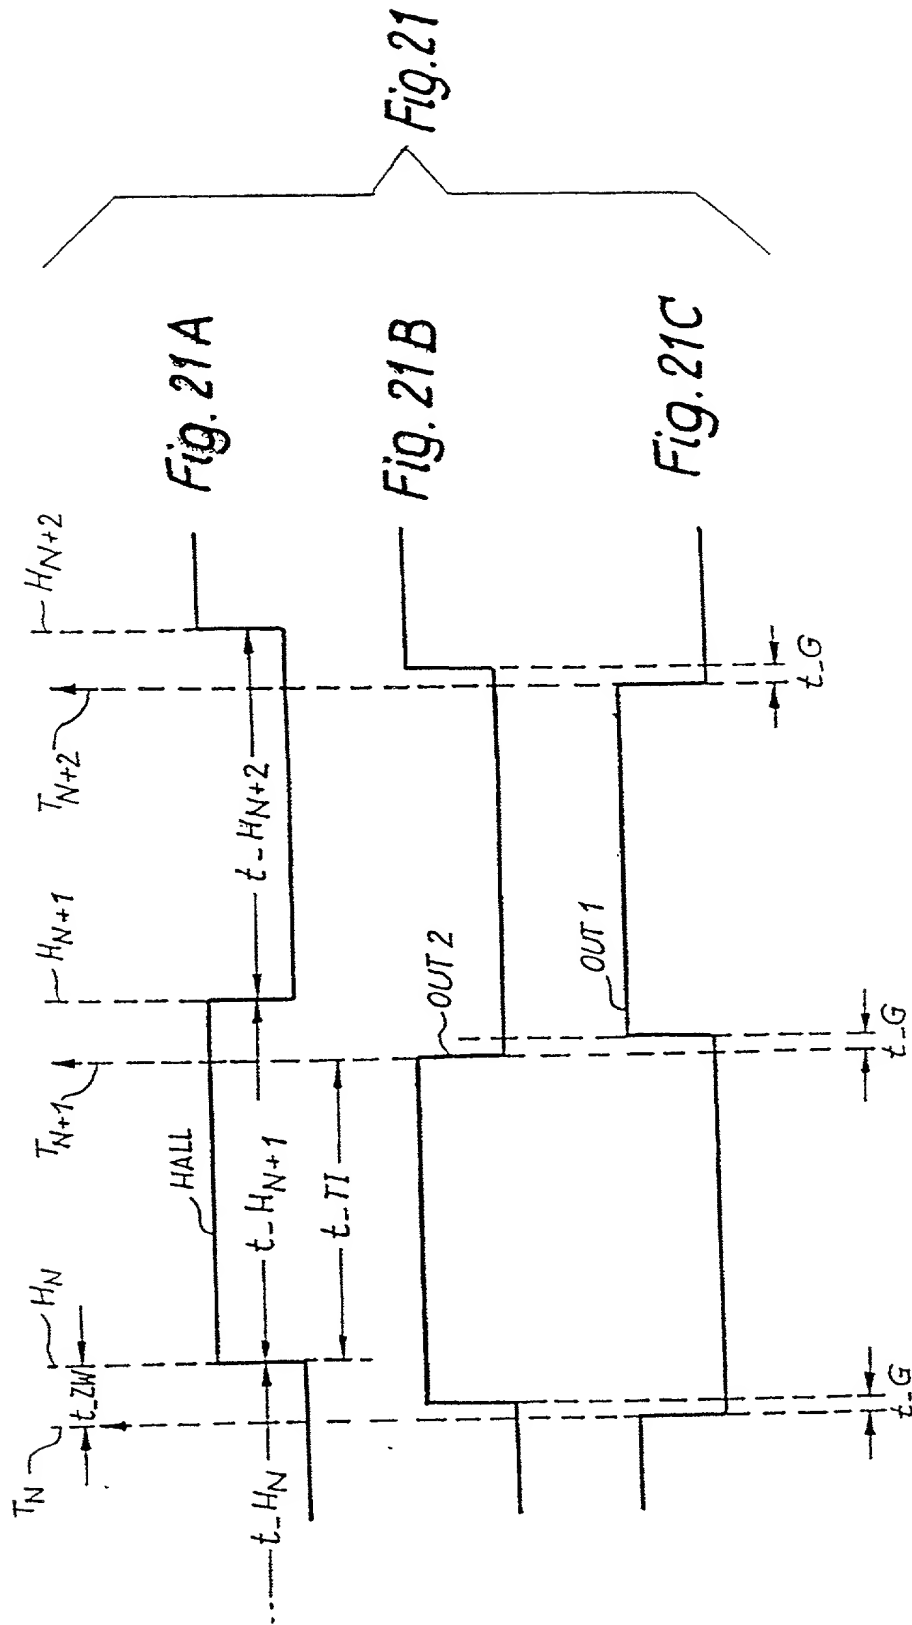

24/24

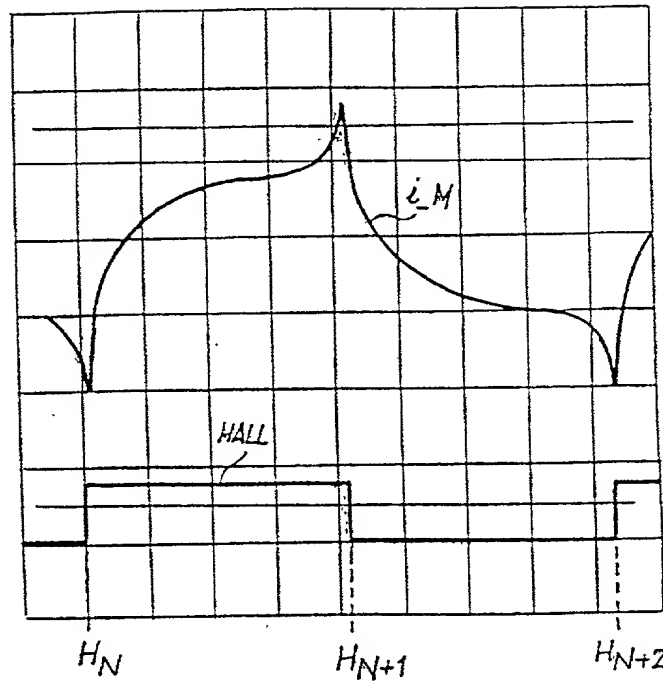


Fig. 22

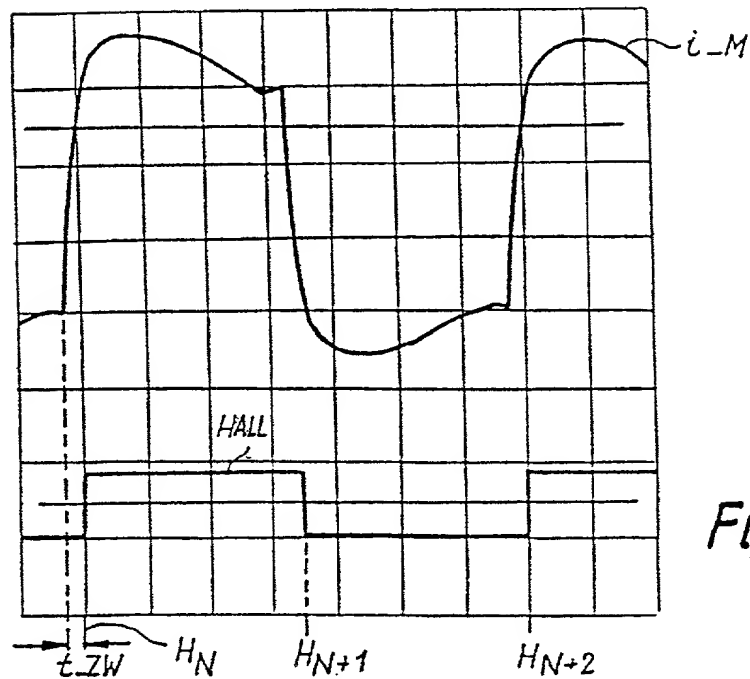


Fig. 23

COMBINED DECLARATION AND POWER OF ATTORNEY

870-003-133
(Docket Number)

As a below named inventor, I hereby declare that:

- my residence, post office address and citizenship are as stated below next to my name;
- I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **Electronically Commutated Motor**
- the specification of which is attached hereto unless the following box is checked: ☒. If the box is checked,
 - the application was filed on **23 JUL. 1999**
 - as U.S. Application Number
 - or PCT International Application Number **PCT/EP99/05282**
 - and was amended by preliminary amendment filed herewith.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application			Priority Not Claimed
198 45 626.3 (Application Number)	Germany (Country)	5 October 1998 Day/Month/Year Filed)	<input type="checkbox"/>
(Application Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/>

To the extent permitted by rule or law, I hereby incorporate by reference the Prior Foreign Application(s) listed above.

I hereby claim the benefits under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

(Provisional Application Number)	(Day/Month/Year Filed)
(Provisional Application Number)	(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability, as defined in 37 CFR §1.56, which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application Number)	(Day/Month/Year Filed)	(Status--patented, pending, abandoned)
(Application Number)	(Day/Month/Year Filed)	(Status--patented, pending, abandoned)

T08360 6T990860

I hereby appoint the attorney(s) and/or agent(s) assigned to the customer number listed below, as may from time to time be amended, belonging to the firm of Ware, Fressola, Van Der Sluys & Adolphson LLP, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Customer Number

4955



--

Address all telephone calls to: Ware, Fressola, Van Der Sluys & Adolphson LLP at (203) 261-1234. Address all correspondence to:

Customer Number

4955



--

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Thomas DUFNER	
Full name of sole or first inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)	
<u>Thomas Dufner</u>	<u>March 23, 2001</u>
Inventor's Signature	Date
<u>Schonach Germany</u>	<u>German</u>
Residence	Citizenship
Post Office Address: <u>Konrad-Adenauer-Strasse 17, D-78136, Schonach, Germany</u>	




Jörg HORNBERGER	
Full name of second inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)	
<u>Jörg Hornberger</u>	<u>March 23, 2001</u>
Inventor's Signature	Date
<u>Dornstetten Germany</u>	<u>German</u>
Residence	Citizenship
Post Office Address: <u>Nottental 1, D-72280, Dornstetten, Germany</u>	

Frank JESKE	
Full name of third inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)	
<u>Frank Jeske</u>	<u>March 23, 2001</u>
Inventor's Signature	Date
<u>St. Georgen Germany</u>	<u>German</u>
Residence	Citizenship
Post Office Address: <u>Friedrich-Ebert-Strasse 13, D-78112, St. Georgen, Germany</u>	

☒ Additional inventors are being named on separately numbered sheets attached hereto.

T03250 5195050

Additional Joint Inventors

<div style="text-align: center;">  Hermann RAPPENECKER </div>	
Full name of fourth inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)	
Inventor's Signature 	Date March 23, 2001
Residence Vöhrenbach Germany	German Citizenship 
Post Office Address: Krankenhausstrasse 26, D-78147, Vöhrenbach, Germany	

<p>5a</p> <p><u>Arno KARWATH</u></p> <p>Full name of fifth inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)</p>	
<p><u>Arno Karwath</u></p> <p>Inventor's Signature</p>	<p><u>March 23, 2001</u></p> <p>Date</p>
<p><u>Rottweil Germany</u></p> <p>Residence</p>	<p><u>DEX</u></p> <p>German Citizenship</p>
<p>Post Office Address: <u>Grosshofenstrasse 10, D-78626, Rottweil, Germany</u></p>	

Full name of sixth inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)	
<u>Bruce</u>	
Inventor's Signature	Date
Residence	Citizenship
Post Office Address:	

Full name of seventh inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)	
Inventor's Signature	Date
Residence	Citizenship
Post Office Address:	

Full name of eighth inventor (given name, middle initial, FAMILY NAME(S) IN UPPER CASE)	
Inventor's Signature	Date
Residence	Citizenship
Post Office Address:	

☐ Additional inventors are being named on separately numbered sheets attached hereto.